

Ref:

ORLBH28-2-E-WH-LED-3000K-DALI-B-EM


Item No: ORLBH – 29442

orlight[®]
FROM SOURCE TO SITE

High powered BH28-2 Eyelid surface fixture, feature IP65 rated construction with a textured epoxy finish. The product includes integrated LED power supply with solid state chipset and polycarbonate diffuser for glare reduction. A CRI value of Ra > 80 ensures light quality and eyelid construction provides asymmetric downward light emission. Available in Black, White and bespoke RAL finishes.



DIMENSIONS

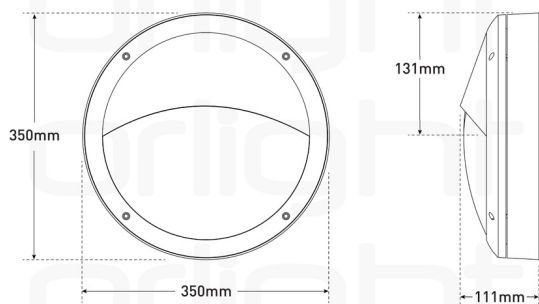

OPTICAL PERFORMANCE

Wattage	18W
Lumen Output	1193LM
Efficacy	66LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	110°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	450MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Diameter	350 MM
Width / Depth	111 MM
Weight	3.15KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK08
Operating Ambient Temperature	-20°C - +45°C

EMERGENCY

Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	179LM

ORLBH28-2-E-WH-LED-3000K-DALI-B-EM


Item No: ORLBH – 29442

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

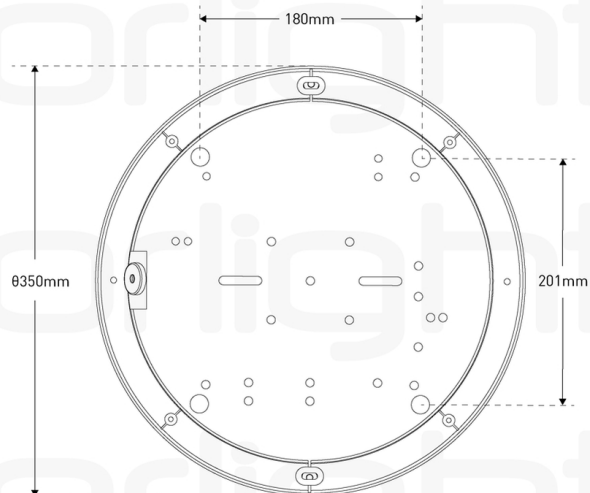

PLEASE NOTE:

This product does not support hot plugging