

Ref:

ORL019MAXI-IP54-WH-NL

Item No: ORL019MAXI – 12817

orlight[®]
FROM SOURCE TO SITE

Architectural miniature downlight, anti-glare baffle, minimal bezel, 70mm diameter, 360° rotation, 35° tilt, clip lamp change with removable fascia. Available as IP20 & IP54. Not suitable for use with conical fire hoods — contact the sales office for fire hood specification. Independently tested and certified for 90-minute fire resistance in solid joist constructions when used with Diablo LED engines. Orlight does not recommend cutting holes before product is received.





DIMENSIONS

ORL019MAXI-IP54

CIRCULAR
CUT OUT: 63mm

35° Tilt
ADJUSTABLE



OPTICAL PERFORMANCE

LOR	44
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	70 MM
Height	64 MM
Cutout	63 MM
Weight	0.09KG
Tilt	35°
Rotation	360°
Finish	WHITE
RAL	RAL 9016
IP Rating	IP54
Fire Rated	YES
Fire Rating	90 MINS - SOLID JOIST
Fire Rated With	DIABLO RETROFIT ENGINE
Fire Test Report	424737
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FASCIA

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL019MAXI-IP54-WH-NL


Item No: ORL019MAXI – 12817

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS


ORL019MAXI-IP54 with **LED ENGINES**  CIRCULAR CUT OUT: 63mm

ADJUSTABLE - 35° Tilt
Allow +5mm for Cable Clearance

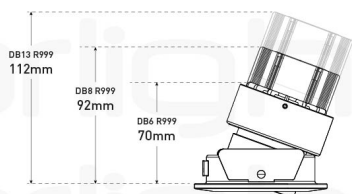

ORL019MAXI-IP54 with **GU10 LAMPS**  CIRCULAR CUT OUT: 63mm

ADJUSTABLE - 35° Tilt
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORL019MAXI-IP54-WH-NL

Item No: ORL019MAXI – 12817

orlight[®]
FROM SOURCE TO SITE



DB13-R999


ACCESSORIES



MC3
11924
Standard Mains Converter for ORL019MAXI



MC3-WL
11925
Standard Mains Converter for ORL019MAXI
with flex



LOUVRE-HC
11753
Honeycomb Louvre