

Ref:

ORLLM175-SS-3000K


Item No: TERRA – 14899

orlight[®]
FROM SOURCE TO SITE

Marine grade 316 stainless steel in-ground fixture complete with integral CREE LED package. Fixture rated to IP67 with no mechanical joints to light source ensuring robust protection against water ingress. Configured to 30 degree beam as standard. Product runs cool meeting all touch temperature requirements. Suitable for the illumination of small/medium trees. Please Note: This product does not support hot plugging.



DIMENSIONS

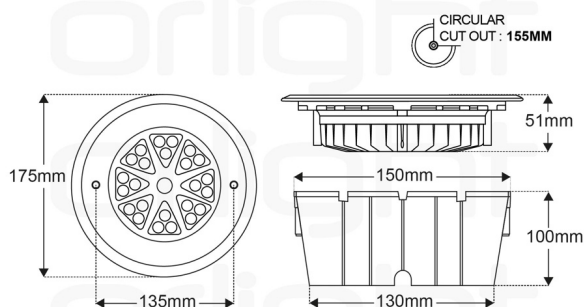

Cable Length: 3000mm

OPTICAL PERFORMANCE

Wattage	25W
Lumen Output	1986LM
Efficacy	80LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	30°
Chipset	CREE XPE
Chip Life	L70 > 60,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	50V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	3000MM

CONSTRUCTION


Installation	RECESSED
Construction	STAINLESS STEEL
Diameter	175 MM
Height	51 MM
Cutout	155 MM
Weight	1.91KG
Finish	316 MARINE GRADE
IP Rating	IP67
IK Rating	IK08
Operating Ambient Temperature	-20°C - +50°C

ORLLM175-SS-3000K

Item No: TERRA – 14899

orlight®

LIGHT DISTRIBUTION



DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP42	ORLRPV350-35-APC	15230	1	1
Switched	IP66	ORLRPV350-35-APC-IP66	31555	1	1

PLEASE NOTE:

This product does not support hot plugging

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver