


Ref:

# LUNGO300-FG-6000K-24V


Item No: LUNGO – 11873

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Recessed linear fixture with IP67 Stainless Steel construction. Integrated CREE XPE LED chipset with Anti-Glare recess & 115 degree light distribution. Inline driver options include switched, 1-10V and DALI dimmable solutions. Please Note: This product does not support hot plugging.

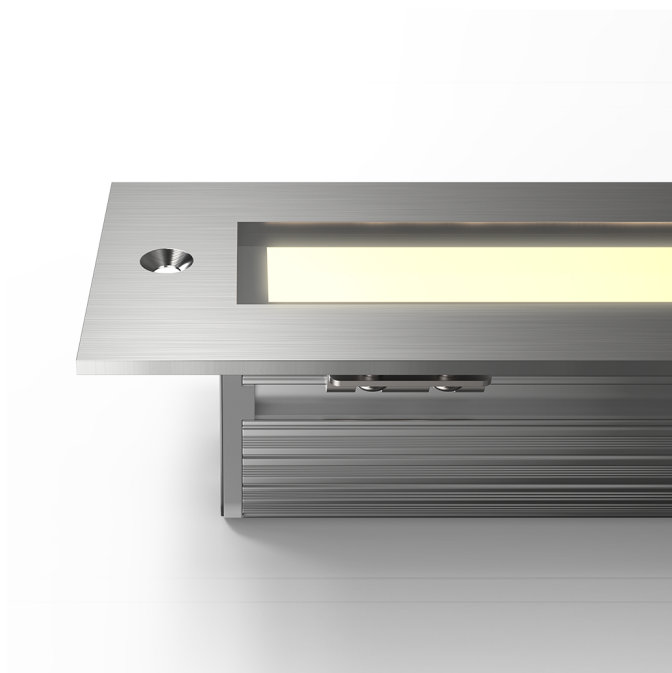

## DIMENSIONS

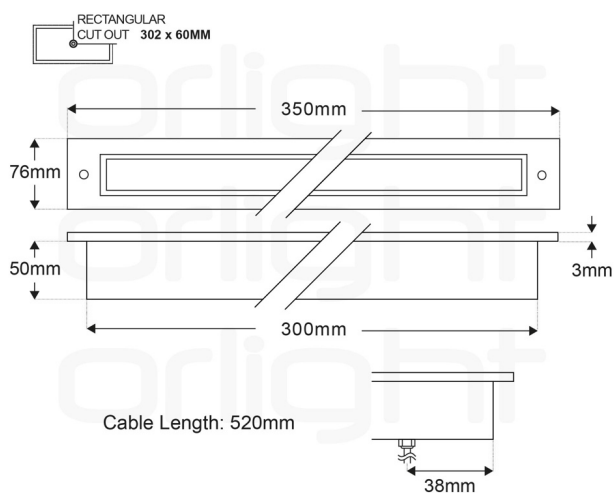

## OPTICAL PERFORMANCE

|              |                 |
|--------------|-----------------|
| Wattage      | 6W              |
| Lumen Output | 322LM           |
| Efficacy     | 54LM/W          |
| CCT          | 6000K           |
| CRI          | CRI > 75        |
| Binning      | 2 STEP MACADAMS |
| Beam Angle   | 115°            |
| Chipset      | CREE XPE        |
| Chip Life    | L70 > 60,500HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT VOLTAGE |
| Voltage                     | 24V              |
| Driver Configuration        | REMOTE           |
| Cable Length                | 520MM            |

## CONSTRUCTION


|               |                  |
|---------------|------------------|
| Installation  | RECESSED         |
| Construction  | STAINLESS STEEL  |
| Length        | 350 MM           |
| Width / Depth | 76 MM            |
| Height        | 50 MM            |
| Cutout        | 302 X 60 MM      |
| Tilt          | FIXED            |
| Finish        | 316 MARINE GRADE |
| IP Rating     | IP67             |

# LUNGO300-FG-6000K-24V

Item No: LUNGO – 11873

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## PLEASE NOTE:

This product does not support hot plugging

## POWER SUPPLY



**ORLRPV2460**  
15214  
24V Switched Driver



**ORLRPV2435**  
15210  
24V Switched Driver



**ORLRPV24150**  
15203  
24V Switched Driver



**ORLRPV24100**  
15199  
24V Switched Driver

## MAINS DIMMABLE



**ORLRPV50-24MD**  
15250  
24V Mains Dimmable Driver



**ORLRPV25-24MD**  
15221  
24V Mains Dimmable Driver



**ORLRPV150-24MD**  
15193  
24V Mains Dimmable Driver



**ORLRPV100-24MD**  
15169  
24V Mains Dimmable Driver

# LUNGO300-FG-6000K-24V

Item No: LUNGO – 11873

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## 1-10V/DALI INTERFACE

---



### ORLRPV-INTERFACE-MINI

15357

Constant Voltage Interface for 1-10V dimming



### ORLDALIINTERFACE-12-24-36V

14054

DALI/PUSH Dimmable Interface

## ACCESSORIES

---



### LUNGO300-BACK-BOX

11869

LUNGO-300 - Back Box