

Ref:

NEBULADQ-150-SUS-15W-BL-4K-DALIB-EM orlight®


Item No: NEBULA SUSPENDED – 32099

FROM SOURCE TO SITE

NEBULADQ-SUS-150 is a high-performance UGR<19 suspended LED downlight in durable aluminium, delivering uniform downward light distribution. High lumen output and CRI >85 for excellent visual clarity in commercial and architectural applications. Supplied with a 30° optic as standard; 60° optic available to order. Emergency versions are supplied with remote emergency gear, for streamlined installation with a minimalist suspended profile. Please note: the driver and emergency inverter are remote to the fitting.



DIMENSIONS

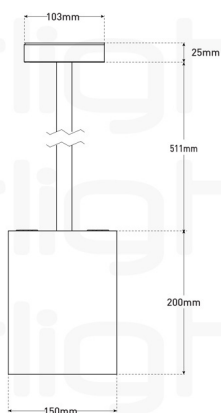

OPTICAL PERFORMANCE

Wattage	15W
Lumen Output	1890LM
Efficacy	126LM/W
CCT	4000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	30° / 60°
UGR	UGR < 19
Chipset	CITIZEN LED CHIPSET
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	350MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SUSPENDED
Construction	ALUMINIUM
Diameter	150 MM
Height	200 MM
Weight	2.8KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
Operating Ambient Temperature	-20°C - +35°C

EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	378LM

NEBULADQ-150-SUS-15W-BL-4K-DALIB-EM **orlight**[®]

Item No: NEBULA SUSPENDED – 32099

FROM SOURCE TO SITE

LIGHT DISTRIBUTION

