

Ref:

TEMPUS-2-MINI-9010-3000K


Item No: TEMPUS – 33150

orlight[®]
FROM SOURCE TO SITE

Aluminium 3W LED miniature fixture featuring recessed COB Citizen CLU0B0 LED light source. Construction rated to IP54 allowing versatile application. A 2 Step MacAdams binning strategy ensures colour consistency with single chip technology providing a consistent beam. Light quality assurance with CRI>Ra 80. Fire Rated to 90 minutes. Driver not included. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

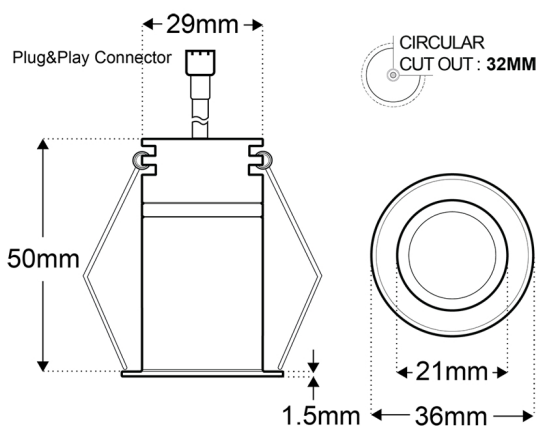

OPTICAL PERFORMANCE

Wattage	3W
Lumen Output	294LM
Efficacy	98LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	30°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 100,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	18V
Milliamp / Current	140MA
Driver Configuration	REMOTE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	36 MM
Height	50 MM
Cutout	32 MM
Weight	0.24KG
Tilt	FIXED
Finish	WHITE
RAL	RAL 9010
IP Rating	IP54
Fire Rated	YES
Fire Rating	90 MINS - SOLID JOIST
Fire Test Report	400398
Operating Ambient Temperature	-20°C - +45°C

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

TEMPUS-2-MINI-9010-3000K

Item No: TEMPUS – 33150

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



SWITCHED/MAINS DRIVER



TEMPUS-2-MINI-DR-DIM-2IC

17174

Driver for Tempus Range

1-10V/DALI DRIVER



MAXDR-MINI-140MA

22247

Mini 1-10V/DALI & Push Dimming Driver