

Ref:

SHP115-2-WH-4000K-DALI-B-EM


Item No: SHP-DL – 29119

orlight[®]
FROM SOURCE TO SITE

Orlight's SHP115 adjustable downlight features a 'thin trim' design to appear subtle in situ. Construction rated to IP20 with Epoxy powder coat finish. Incorporating a single CREE LED light source which ensures the uniformity of the beam. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

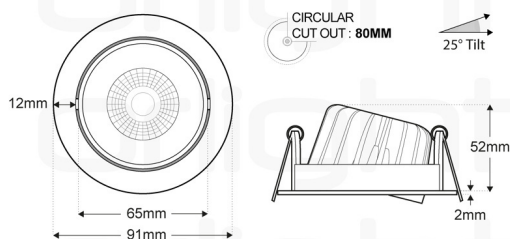

OPTICAL PERFORMANCE

Wattage	10W
Lumen Output	1240LM
Efficacy	124LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	38°
Chipset	CREE 1507N
Chip Life	L80 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	220MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	91 MM
Height	52 MM
Cutout	80 MM
Tilt	25°
Rotation	360°
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20

EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	373LM

SHP115-2-WH-4000K-DALI-B-EM

Item No: SHP-DL – 29119

LIGHT DISTRIBUTION

