

Ref:


ORLLED1200-UGR-40W-4K-9016-EM

Item No: PANEL – 31827

orlight[®]
FROM SOURCE TO SITE

Orlight's 1200x300 UGR solid state LED panel constructed from Aluminium with TPA V-0 compliant diffuser and finished in White RAL9016. Low energy solution for office and commercial applications. Offering benefits such as instant start, no flickering, silent running and no maintenance.

Please Note: This product does not support hot plugging.

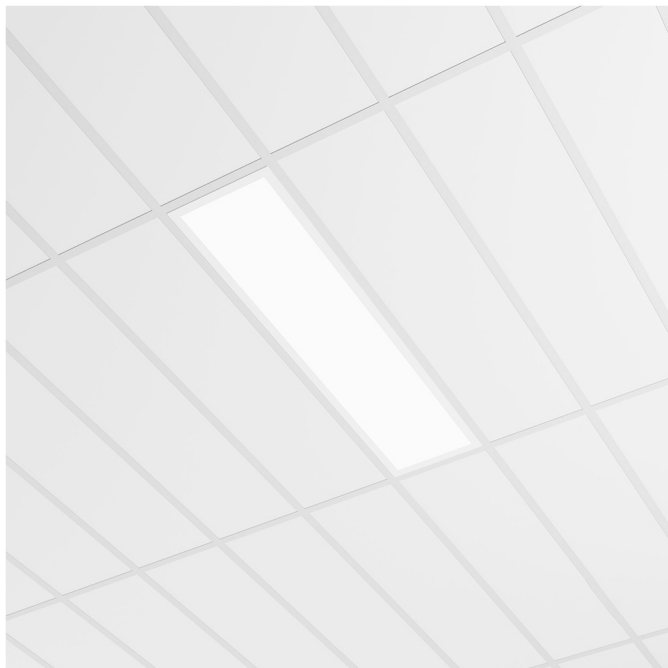

UGR
< 19

IP20

DIMENSIONS



OPTICAL PERFORMANCE

Wattage	40W
Lumen Output	5240LM
Efficacy	131LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
UGR	UGR < 19
Chipset	LED
Chip Life	L70 > 54,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	950MA
Driver Configuration	REMOTE
Control	SWITCHED

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	1195 MM
Width / Depth	295 MM
Height	10 MM
Weight	3.4KG
Diffuser	MICROPRISMATIC
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Operating Ambient Temperature	-25°C - +45°C

EMERGENCY


Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	420LM

ORLLED1200-UGR-40W-4K-9016-EM

Item No: PANEL – 31827

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



SUSPENSION KIT



SUS-KIT-PANEL-GP
17047
Suspension Kit Gripper



SUS-KIT-LOOP
17041
Suspension Kit Loop