

Ref:

ORLLM736-HS-BL-3000K


Item No: TELESO – 14958

orlight[®]
FROM SOURCE TO SITE

Miniature recessed fixture complete with integral CREE LED package. Frosted optic serves to minimise glare coupled with a diffuse beam distribution. Marine Grade 316 Stainless Steel, Bronze and Black finishes available with construction rated to IP67. Inline driver options include Mains, 1-10V and DALI dimmable solutions. Additionally, an Inground Tube accessory is included with the product. Please Note: This product does not support hot plugging.



DIMENSIONS

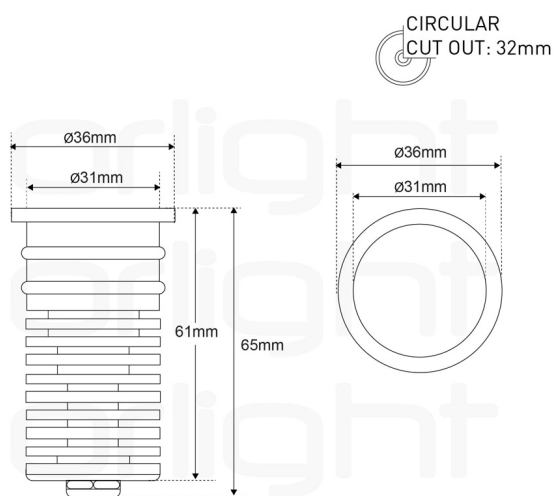

Cable Length: 1100mm

OPTICAL PERFORMANCE

Wattage	3.8W
Lumen Output	306LM
Efficacy	81LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	30°
Chipset	CREE
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	11V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	1100MM

CONSTRUCTION


Installation	RECESSED
Construction	ALUMINIUM
Diameter	36 MM
Width / Depth	31 MM
Height	65 MM
Cutout	32 MM
Weight	0.2KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9011
IP Rating	IP67
IK Rating	IK07
Operating Ambient Temperature	-20°C - +45°C

ORLLM736-HS-BL-3000K

Item No: TELESO – 14958


orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL DIMENSIONS

TELESO - ORLLM736-HS
Inground Tube Accessory

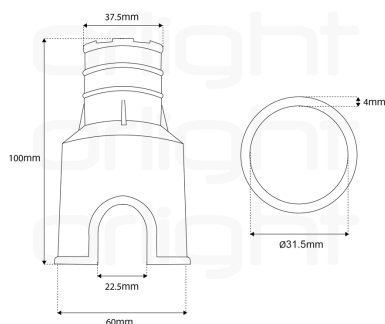

DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP68	ORLRPV350CC	15231	1	2
Switched	IP42	ORLRPV350-35-APC	15230	3	8
Switched	IP66	ORLRPV350-35-APC-IP66	31555	3	8
Mains	IP20	ORLRPV20D-350MA	46595	1	3
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	4
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	1	4

PLEASE NOTE:

This product does not support hot plugging

ORLLM736-HS-BL-3000K

Item No: TELESO – 14958

orlight[®]
FROM SOURCE TO SITE

SWITCHED (IP42)



ORLRPV350-35-APC

15230

Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66

31555

Constant current 350mA Driver

SWITCHED (IP68)



ORLRPV350CC

15231

Constant current 350mA Driver

MAINS (IP20)



ORLRPV20D-350MA

46595

Mains Dimmable Driver

ORLLM736-HS-BL-3000K

Item No: TELESO – 14958

orlight[®]
FROM SOURCE TO SITE

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI
Driver