

Ref:

ORLCL-PND55-ABR-1500-3K


Item No: CL - PENDANT – 14019

orlight[®]
FROM SOURCE TO SITE

LED suspended ceiling mounted pendant constructed from Aluminium and finished in Anodized Bronze with Black braided cable. Available in 3000K colour temperature with CRI >92 for light quality assurance. This product uses a remote driver.



DIMENSIONS

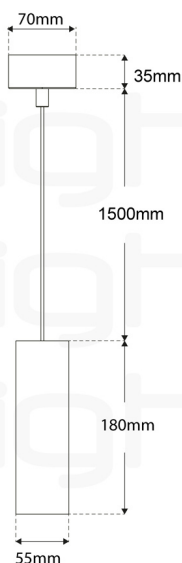

OPTICAL PERFORMANCE

Wattage	13W
Lumen Output	1182LM
Efficacy	91LM/W
CCT	3000K
CRI	CRI > 92
Beam Angle	30°
Chipset	CITIZEN LED CHIPSET

ELECTRICAL

Voltage	38V
Milliamp / Current	300MA
Driver Configuration	REMOTE
Control	SWITCHED
Cable Length	1500MM

CONSTRUCTION


Installation	CEILING MOUNTED
Construction	ALUMINIUM
Diameter	55 MM
Height	180 MM
Tilt	FIXED
Rotation	FIXED
Finish	BRUSHED BRONZE
IP Rating	IP20
Lamp Change	SOLID STATE LED

ORLCL-PND55-ABR-1500-3K

Item No: CL - PENDANT – 14019

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



SWITCHED DRIVER



DOMINO-300MA-DR-DIM

21974

Switched & Mains Dimmable Driver

DALI DRIVER




ORL-DALI-NFC-15CC-300MA

34809

NFC Programmable 15W CC 300mA DALI
Driver

1-10V / PUSH DIM DRIVER



MAXDR-MINI-300MA

22250

Mini 1-10V/DALI & Push Dimming Driver