

Ref:

ORL8736-4000K


Item No: CUBE – 13773

orlight[®]
FROM SOURCE TO SITE

Recessed feature fitting, horizontally mounted and IP65 rated. The stepped louvre provides a soft downward emission of light. Integrated mains dimmable LED driver for ease of installation. Cast Aluminium face plate construction with Solid State CREE LED light source and CRI>80 to ensure light quality.



DIMENSIONS

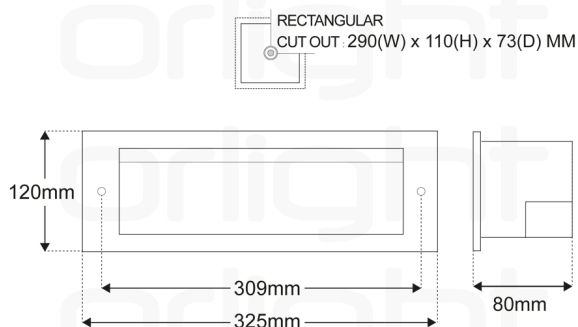

OPTICAL PERFORMANCE

Wattage	15W
Lumen Output	1008LM
Efficacy	67LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	100°
Chipset	CREE 5050
Chip Life	L70 > 60,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	550MA
Driver Configuration	INTEGRAL
Control	MAINS DIMMABLE

CONSTRUCTION


Installation	WALL RECESSED
Construction	ALUMINIUM
Length	325 MM
Width / Depth	80 MM
Height	120 MM
Cutout	290 (W) X 110 (H) MM
Weight	1.068KG
Finish	GREY
RAL	RAL 9023
IP Rating	IP65
Operating Ambient Temperature	-20°C - +50°C

ORL8736-4000K

Item No: CUBE – 13773

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

