

Ref:

# ORLEDBT-600-9016-4K-DALI-B-EM


Item No: ORLEDBT – 28929

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Linear LED fitting featuring Aluminium construction finished in white RAL9016 and an opal diffuser. Integral LED driver with configurations to accommodate 1-10V, DALI and emergency options. This 2FT LED luminaire can be surface mounted or suspended depending on the desired application. Do not connect battery supply until 220/240V A.C. supply is permanently fed, and lamp fitted. Allow 24 hours charge before running lamp in emergency mode.



## DIMENSIONS

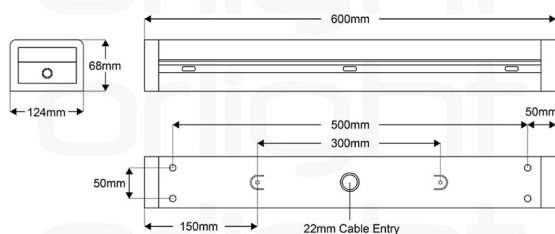

## OPTICAL PERFORMANCE

|              |                 |
|--------------|-----------------|
| Wattage      | 21W             |
| Lumen Output | 1953LM          |
| Efficacy     | 93LM/W          |
| CCT          | 4000K           |
| CRI          | CRI > 80        |
| Beam Angle   | 120°            |
| Chipset      | SMD 2835 LED    |
| Chip Life    | L70 > 50,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 240V             |
| Milliamp / Current          | 500MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | DALI DIMMABLE    |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | SURFACE       |
| Construction                  | ALUMINIUM     |
| Length                        | 600 MM        |
| Width / Depth                 | 124 MM        |
| Height                        | 68 MM         |
| Weight                        | 2KG           |
| Finish                        | WHITE         |
| RAL                           | RAL 9016      |
| IP Rating                     | IP20          |
| IK Rating                     | IK08          |
| Operating Ambient Temperature | -20°C - +45°C |


## EMERGENCY

|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | INTEGRAL       |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 292LM          |

# ORLLEDBT-600-9016-4K-DALI-B-EM

Item No: ORLLEDBT – 28929

## LIGHT DISTRIBUTION



## SUSPENSION KIT



**999-ORLALP018-R-SW**  
13781  
Suspension Kit