

Ref:

ORLLM22-HS-BL-4000K

Item No: TELESO – 14918


orlight[®]
FROM SOURCE TO SITE

Miniature recessed fixture complete with integral CREE XPE package and a 20 degree beam. Marine Grade 316 Stainless Steel option with construction rated to IP68. Bronze and Black RAL9011 finish options feature aluminium construction with Epoxy Powder coat rated to IP65. Product footprint of 22mm diameter ensures versatile application. Inline driver options include switched, 1-10V and DALI dimmable solutions. Please Note: This product does not support hot plugging.



DIMENSIONS

CIRCULAR
CUT OUT: 18mm

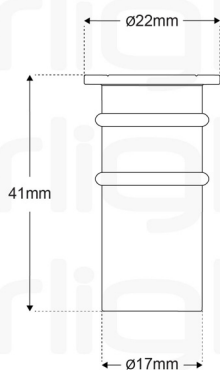

Cable Length: 1100mm

OPTICAL PERFORMANCE

Wattage	1W
Lumen Output	66LM
Efficacy	66LM/W
CCT	4000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	20°
Chipset	CREE
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	3.2V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	1100MM


CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	22 MM
Width / Depth	17 MM
Height	41 MM
Cutout	18 MM
Weight	0.05KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9011
IP Rating	IP65
IK Rating	IK06
Operating Ambient Temperature	-20°C - +45°C

ORLLM22-HS-BL-4000K

Item No: TELESO – 14918

LIGHT DISTRIBUTION




DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP68	ORLRPV350CC	15231	1	8
Switched	IP42	ORLRPV350-35-APC	15230	10	30
Switched	IP66	ORLRPV350-35-APC-IP66	31555	10	30
Mains	IP20	ORLRPV20D-350MA	46595	1	13
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	15
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	2	13

PLEASE NOTE:


This product does not support hot plugging

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

ORLLM22-HS-BL-4000K

Item No: TELESO – 14918

orlight[®]
FROM SOURCE TO SITE

SWITCHED (IP68)



ORLRPV350CC

15231

Constant current 350mA Driver

MAINS (IP20)



ORLRPV20D-350MA

46595

Mains Dimmable Driver

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI
Driver