

Ref:

# VECTIV-RC-64W-BL-3K-1979-DALI-B-EM

Item No: VECTIV – 42260

**orlight**  
FROM SOURCE TO SITE


Elevate your professional space with our advanced aluminium linear fixture. The recessed version, featuring a cutting-edge pod louvre design, seamlessly integrates into your environment. With a remote driver for added convenience, this fixture delivers sleek and efficient lighting, setting a new standard for modern, sophisticated illumination in professional settings. Configurations in excess of a standard single length, please refer to the length matrix here which provides options for lengths up to 15M.



UGR  
< 19

IP20

## DIMENSIONS

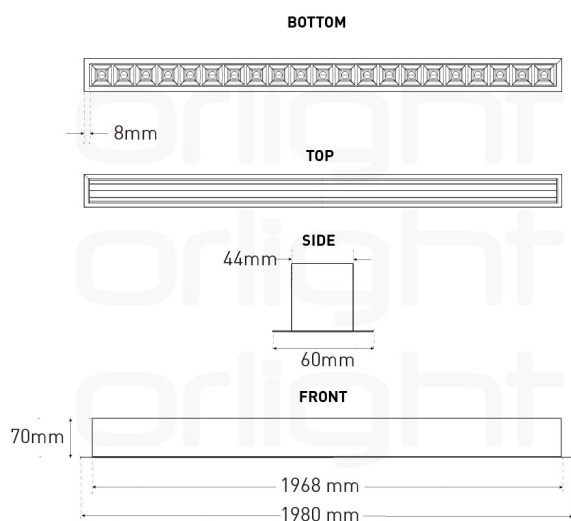

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 64W              |
| Lumen Output         | 7232LM           |
| Efficacy             | 113LM/W          |
| CCT                  | 3000K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 80°              |
| UGR                  | <19              |
| Chipset              | OSRAM 2835       |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 220V             |
| Milliamp / Current          | 1400MA           |
| Driver Configuration        | INTEGRAL         |
| Control                     | DALI DIMMABLE    |

## CONSTRUCTION

|                               |                 |
|-------------------------------|-----------------|
| Installation                  | RECESSED        |
| Construction                  | ALUMINIUM       |
| Length                        | 1979 MM         |
| Width / Depth                 | 60 MM           |
| Height                        | 70 MM           |
| Cutout                        | 1965 MM X 45 MM |
| Finish                        | BLACK           |
| RAL                           | RAL 9005        |
| IP Rating                     | IP20            |
| IK Rating                     | IK08            |
| Operating Ambient Temperature | -20°C - +60°C   |

## EMERGENCY


|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | INTEGRAL       |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 334LM          |

# VECTIV-RC-64W-BL-3K-1979-DALI-B-EM

Item No: VECTIV – 42260



## LIGHT DISTRIBUTION



## ADDITIONAL PRODUCT IMAGES



## ADDITIONAL DIMENSIONS

