


Ref:

ORLLED600-IP65-20W-4K-9016-DALIB-EM


Item No: PANEL – 27293

orlight[®]
FROM SOURCE TO SITE

Solid State IP65 LED panel light 600x600, matt white finished Aluminium surrounded with TPA compliant V0 diffuser. Low energy solution for office and commercial applications. Offering benefits such as instant start, no flickering, silent running and no maintenance. Please Note: This product does not support hot plugging.

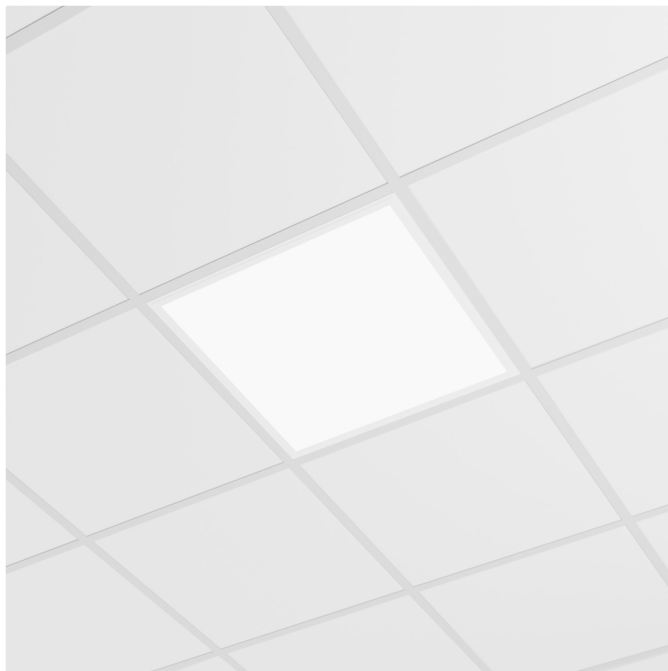

DIMENSIONS

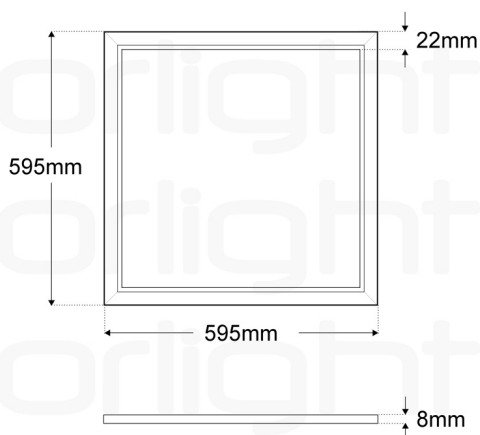

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2780LM
Efficacy	139LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	32-36V
Milliamp / Current	500MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	595 MM
Width / Depth	595 MM
Height	8 MM
Weight	3.05KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65

EMERGENCY


Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	417LM

ORLLED600-IP65-20W-4K-9016-DALIB-EM


Item No: PANEL – 27293

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



SURFACE MOUNTING KIT



ORLLED600-SMK-9016

14812

Surface Mounting Kit for Led Panel