

Ref:

ORL1018-1-AW-9016


Item No: ORL1018 – 13001

orlight[®]
FROM SOURCE TO SITE

The ORL1018 Trimless Magnetic Downlight is designed to be practically invisible in-situ. The fixture incorporates an Anti-Glare baffle with both 360 degree rotation and tilt facility. A magnetic lamp change mechanism ensures ease of maintenance without damage to delicate ceilings. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

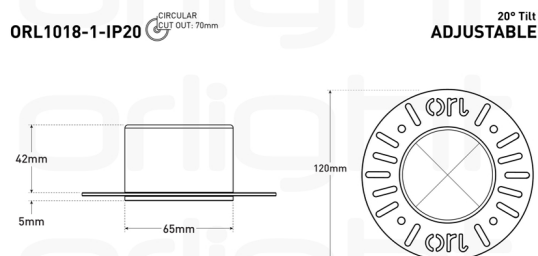

OPTICAL PERFORMANCE


LOR	94
-----	----

CONSTRUCTION


Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	65 MM
Height	47 MM
Cutout	70 MM
Weight	0.24KG
Tilt	20°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

ADDITIONAL DIMENSIONS

ORL1018-1-IP20 with **LED ENGINES** **ADJUSTABLE - 20° Tilt**
Allow +5mm for Cable Clearance

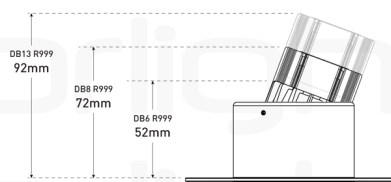

ORL1018-1-IP20 with **GU10 LAMPS** **ADJUSTABLE - 20° Tilt**
Allow +20mm for Cable Clearance



ORL1018-1-AW-9016

Item No: ORL1018 – 13001

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

ACCESSORIES




MC2-TR

11915
Long Spring Mains Convertor for Orlight
Trimless series



MC2-TR-WL

11918
Long Spring Mains Convertor for Orlight
Trimless series with flex



LOUVRE-HC

11753
Honeycomb Louvre