

Ref:

ELIO-55-SUS-11W-BL-4K-DALI-B-EM


Item No: ELIO SUSPENDED – 32499

orlight[®]
FROM SOURCE TO SITE

ELIO 55 is a high-performance suspended pendant, IP20 rated for reliable operation and protection. Available in black or white finish, with a high CRI for accurate colour rendering. Comes with a BESA mounting accessory and an integral driver (emergency remote), for quick, secure installation.



DIMENSIONS

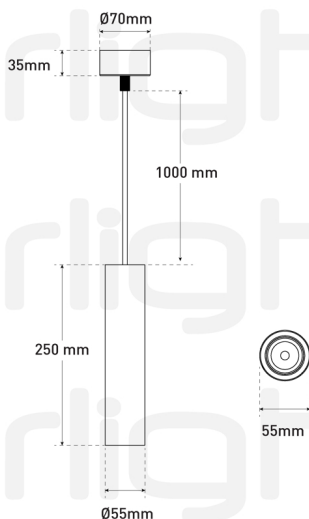

OPTICAL PERFORMANCE

Wattage	11W
Lumen Output	1210LM
Efficacy	110LM/W
CCT	4000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	20°
UGR	UGR < 19
Chipset	BRIDGELUX
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	250MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE
Cable Length	1000MM

CONSTRUCTION

Installation	SUSPENDED
Construction	ALUMINIUM
Diameter	55 MM
Height	250 MM
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	327LM

ELIO-55-SUS-11W-BL-4K-DALI-B-EM

Item No: ELIO SUSPENDED – 32499

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

