


Ref:

MICRO-BL-3000K


Item No: MICRO – 11929

orlight[®]
FROM SOURCE TO SITE

4W miniature fixed solid state fixture with a cutout size of 44mm. Constructed from Aluminium, rated to IP44 and finished in either black or white. This downlight is available in a variety of colour temperatures and CRI>90 provides light quality assurance. Switched/Mains Dimmable driver included. Orlight does not recommend cutting of holes prior to receipt of product in hand.

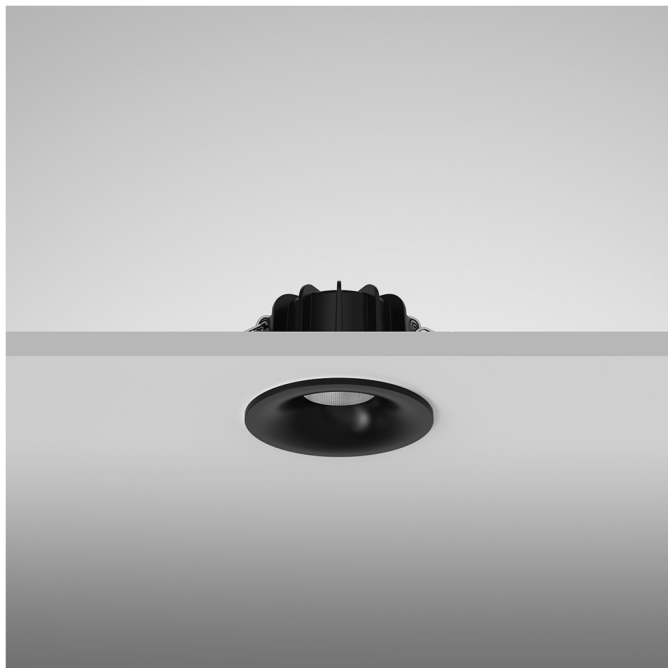

DIMENSIONS

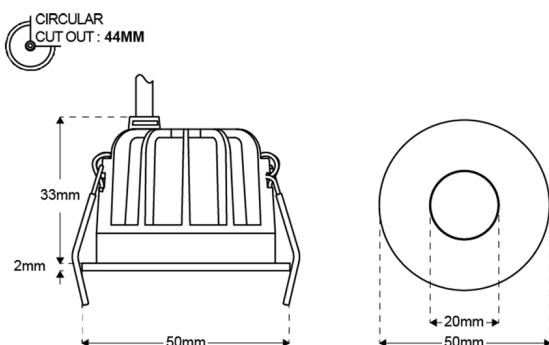

OPTICAL PERFORMANCE

Wattage	4W
Lumen Output	357LM
Efficacy	89LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	48°
UGR	UGR < 12
Chipset	COB LED
Chip Life	L80 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	17V
Milliamp / Current	180MA
Driver Configuration	REMOTE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	50 MM
Height	35 MM
Cutout	44 MM
Weight	0.065KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP44

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

MICRO-BL-3000K

Item No: MICRO – 11929


orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL DIMENSIONS

Driver Dimensions



1-10V/DALI DRIVER



MAXDR-MINI-180MA

22248

Mini 1-10V/DALI & Push Dimming Driver