

Ref:

ORLIC2M-WH-9016

Item No: ORLIC – 14300

orlight[®]
FROM SOURCE TO SITE

Architectural twin curved downlight featuring die-cast aluminium construction, anti-glare baffle, and a magnetic lamp change mechanism. Facilitates 360 degree rotation and tilt capability. Twin circular cutout allows for ease of installation. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	58
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	184 MM
Width / Depth	100 MM
Height	55 MM
Cutout	90 MM X 2
Tilt	20°
Rotation	360°
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORLIC2M-IP20



20° Tilt
ADJUSTABLE

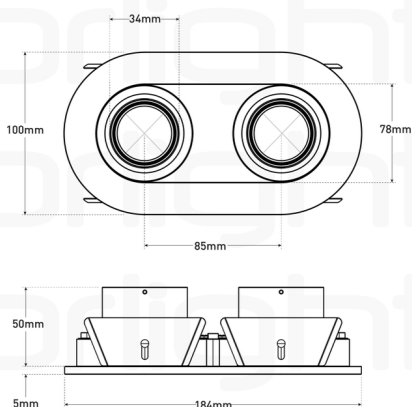


ORLIC2M-WH-9016

Item No: ORLIC – 14300

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

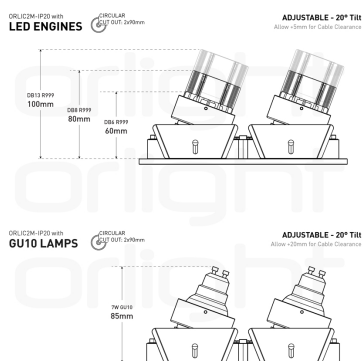

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

ORLIC2M-WH-9016

Item No: ORLIC – 14300

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



MC2-SL

11911


Slim Spring Mains Convertor for Orlight
Magnetic series



MC2-SL-WL

11912

Slim Spring Mains Convertor for Orlight
Magnetic series with flex



LOUVRE-HC

11753

Honeycomb Louvre