

Ref:

SABRE-1M-4000K


Item No: SABRE – 16584

orlight[®]
FROM SOURCE TO SITE

This IP65 exterior LED bollard emits a solid stream of light from a single side and is great for hospitality and commercial applications. Constructed from aluminium, available in 4000K offering excellent functionality as well as decoration to an external scheme.



DIMENSIONS

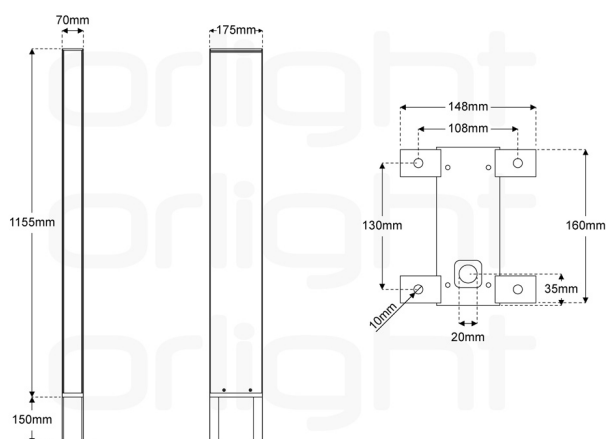

OPTICAL PERFORMANCE

Wattage	26W
Lumen Output	1168LM
Efficacy	45LM/W
CCT	4000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	115°
Chipset	TRIDONIC SMD CHIPSET
Chip Life	L70 > 60,000HRS

ELECTRICAL

Voltage	220-240V
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION

Installation	ROOT MOUNTED
Construction	ALUMINIUM
Length	175 MM
Width / Depth	70 MM
Weight	7KG
Finish	GREY
RAL	RAL 9023
IP Rating	IP65

SABRE-1M-4000K

Item No: SABRE – 16584

LIGHT DISTRIBUTION

