


Ref:

SASI1215-25W-3K-9016-DALI-B-EM


Item No: SASI – 44989

orlight[®]
FROM SOURCE TO SITE

Utilises high intensity LED's to achieve up to 84lumens per circuit Watt with a CRI>80 for light quality assurance. Matte White finished Aluminium surround with PMMA diffuser. Product can be adjusted to fit within any ceiling grid. Compliant with DALI or 0-10V protocols. 3 Hour emergency version available. Suspension Kit Available Part L Compliant Please Note: This product does not support hot plugging.

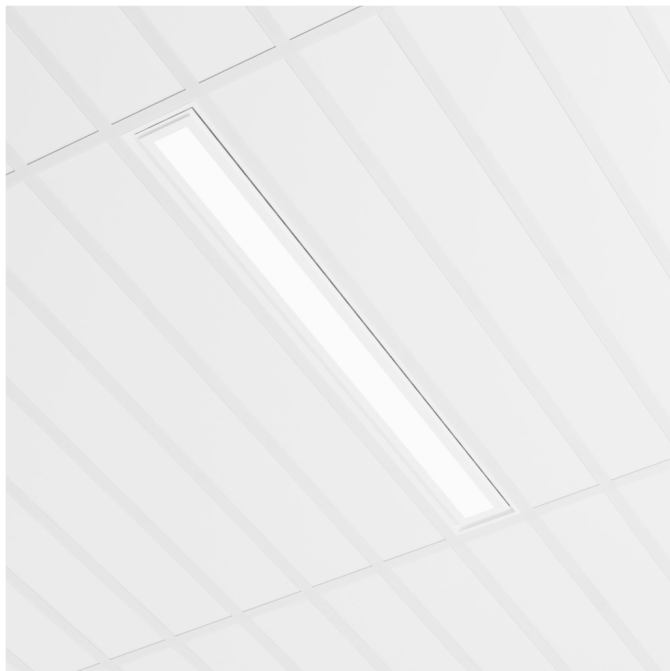

DIMENSIONS

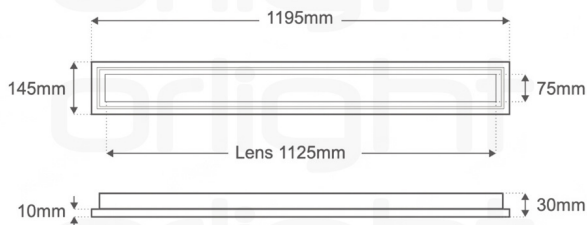

OPTICAL PERFORMANCE

Wattage	25W
Lumen Output	2000LM
Efficacy	80LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	SAMSUNG L561B
Chip Life	L70 < 36,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	700MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	1195 MM
Width / Depth	145 MM
Height	30 MM
Diffuser	PMMA
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20


EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	239LM

SASI1215-25W-3K-9016-DALI-B-EM

Item No: SASI – 44989

LIGHT DISTRIBUTION



SUSPENSION KIT



SUS-KIT-LOOP
17041
Suspension Kit Loop



SUS-KIT-PANEL-GP
17047
Suspension Kit Gripper