

Ref:

VECTIV-RC-46W-BL-4K-1420-DALI

Item No: 34277

orlight[®]
FROM SOURCE TO SITE


Elevate your professional space with our advanced aluminium linear fixture. The recessed version, featuring a cutting-edge pod louvre design, seamlessly integrates into your environment. With a remote driver for added convenience, this fixture delivers sleek and efficient lighting, setting a new standard for modern, sophisticated illumination in professional settings. Configurations in excess of a standard single length, please refer to the length matrix here which provides options for lengths up to 15M.



UGR
< 19

IP20

DIMENSIONS

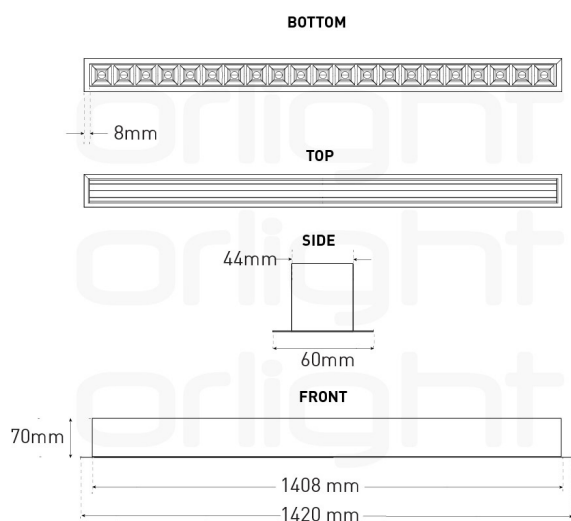

OPTICAL PERFORMANCE

Lumen Output	5520LM
Wattage	46W
Efficacy	120LM/W
CCT	4000K
CRI	CRI > 80
UGR	<19
Beam Angle	80°
Binning	2 STEP MACADAMS
Chipset	OSRAM 2835
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Milliamp / Current	1000MA
Voltage	220V
Control	DALI DIMMABLE
Driver Configuration	INTEGRAL

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Rotation	FIXED
Tilt	FIXED
Width / Depth	60 MM
Length	1420 MM
Height	70 MM
Cutout	1408 MM X 45 MM
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
IK Rating	IK08
Operating Ambient Temperature	-20°C - 60°C
Lamp Change	SOLID STATE LED


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	INTEGRAL

VECTIV-RC-46W-BL-4K-1420-DALI

Item No: 34277

LIGHT DISTRIBUTION



ADDITIONAL DIMENSIONS

