

Ref:

# GLIDE-MINI-8W-WH-4K

Item No: GLIDE – 45016


**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

High-performance solid-state adjustable LED downlight with high CRI for accurate colour rendering. Featuring a compact aluminium body, matte white finish and low-glare optics for precise directional lighting.



**NEW!**

## DIMENSIONS

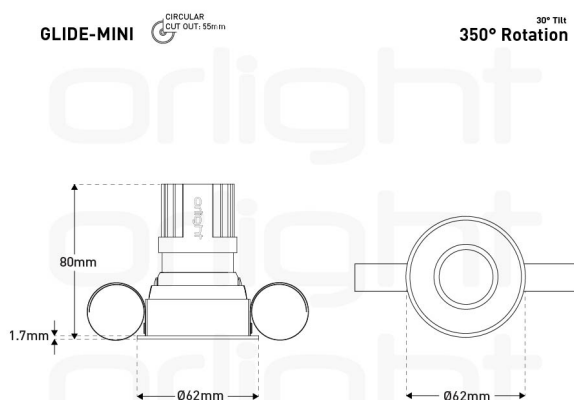

## OPTICAL PERFORMANCE

|              |                    |
|--------------|--------------------|
| Wattage      | 8W                 |
| Lumen Output | 952LM              |
| Efficacy     | 127LM/W            |
| CCT          | 4000K              |
| CRI          | CRI > 96           |
| Binning      | 2 STEP MACADAMS    |
| Beam Angle   | 12°/ 24°/ 36°/ 55° |
| Chipset      | BRIDGELUX          |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Milliamp / Current          | 200MA            |
| Driver Configuration        | REMOTE           |

## CONSTRUCTION

|              |            |
|--------------|------------|
| Installation | RECESSED   |
| Construction | ALUMINIUM  |
| Diameter     | 62 MM      |
| Height       | 80 MM      |
| Cutout       | 55 MM      |
| Tilt         | 30°        |
| Rotation     | 350°       |
| Finish       | MATT WHITE |
| RAL          | RAL 9010   |
| IP Rating    | IP54       |

## EMERGENCY

|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | REMOTE    |