


Ref:

GRAFIK5-WH-2700K-1-10V


Item No: GRAFIK – 11306

orlight[®]
FROM SOURCE TO SITE

Orlight's Grafik range is a perfect combination of lens and reflectors. This recessed LED downlight is constructed from Aluminium, available in a variety of colour temperatures and CRI>90 provides light quality assurance. Finished in white with optional order only reflectors to suit your aesthetical requirements. Please Note: This product does not support hot plugging. Orlight does not recommend cutting of holes prior to receipt of product in hand.

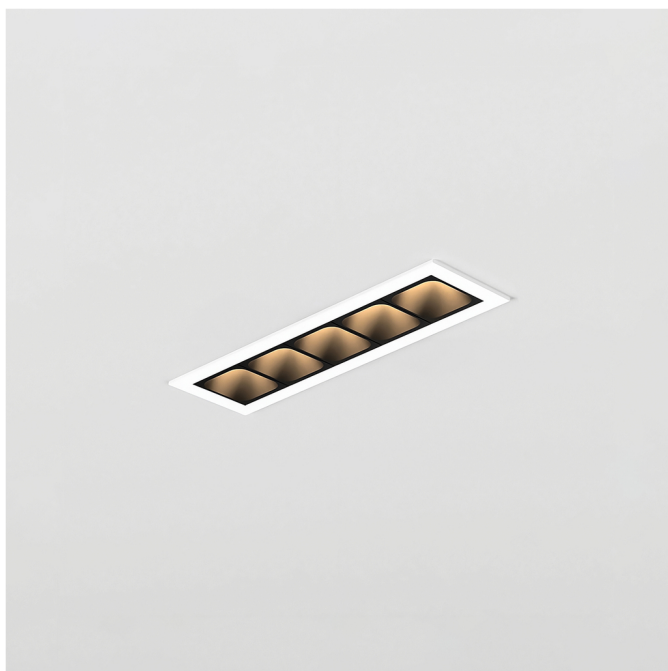

DIMENSIONS

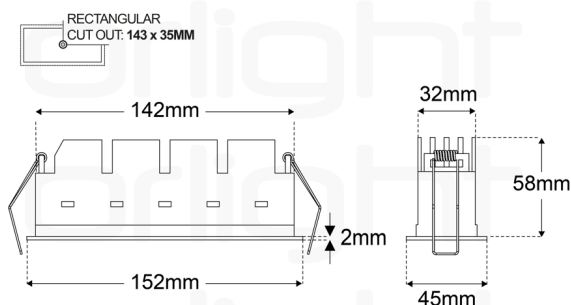

OPTICAL PERFORMANCE

Wattage	13W
Lumen Output	832LM
Efficacy	64LM/W
CCT	2700K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	40°
UGR	UGR < 19
Chipset	OSRAM LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	16V
Milliamp / Current	700MA
Driver Configuration	REMOTE
Control	1-10V

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	152 MM
Width / Depth	45 MM
Height	58 MM
Cutout	143 MM X 35 MM
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Operating Ambient Temperature	-20°C - +35°C

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

GRAFIK5-WH-2700K-1-10V


Item No: GRAFIK – 11306

orlight[®]
FROM SOURCE TO SITE


LIGHT DISTRIBUTION




COMPATIBLE REFLECTORS



GRAFIK5-RF-GL
11302
Grafik Pod Reflector



GRAFIK5-RF-MT
11303
Grafik Pod Reflector



GRAFIK5-RF-WH
11304
Grafik Pod Reflector