


Ref:

MICRO-TL-BL-3000K


Item No: MICRO – 11934

orlight[®]
FROM SOURCE TO SITE

4W miniature adjustable solid-state fixture with a cutout size of 44mm. Constructed from Aluminium, rated to IP20 and finished in either black or white. This downlight is available in a variety of colour temperatures and CRI>90 provides light quality assurance. Switched/Mains Dimmable driver included. Orlight does not recommend cutting of holes prior to receipt of product in hand.

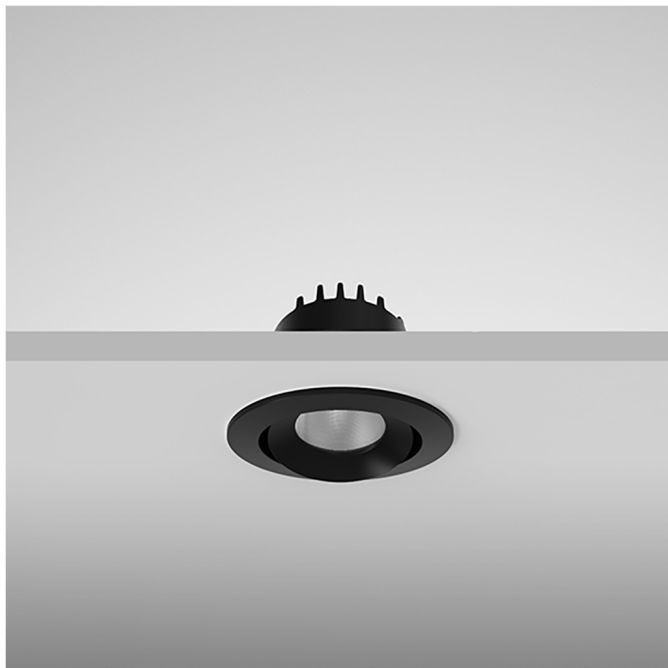

DIMENSIONS

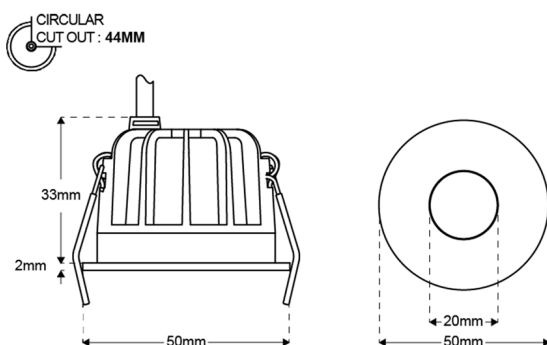

OPTICAL PERFORMANCE

Wattage	4W
Lumen Output	357LM
Efficacy	89LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	48°
UGR	UGR < 12
Chipset	COB LED
Chip Life	L80 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	17V
Milliamp / Current	180MA
Driver Configuration	REMOTE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	50 MM
Height	35 MM
Cutout	44 MM
Weight	0.065KG
Tilt	20°
Rotation	360°
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

MICRO-TL-BL-3000K

Item No: MICRO – 11934


orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL DIMENSIONS

Driver Dimensions



1-10V/DALI DRIVER



MAXDR-MINI-180MA

22248

Mini 1-10V/DALI & Push Dimming Driver