

Ref:

ORL1815-BR-3000K-DALI


Item No: 34873

orlight[®]
FROM SOURCE TO SITE

Surface mounted wall light with a 10W SMD LED chipset. Available in Polished Stainless Steel and Brushed Bronze with a frosted polycarbonate diffuser, rated to IP44. This fitting features an integral 12V driver.



DIMENSIONS

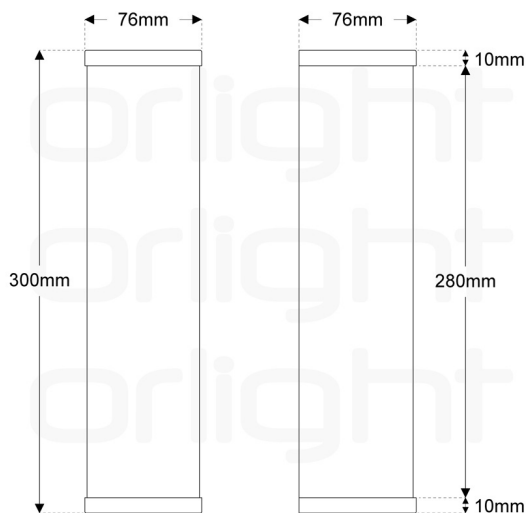

OPTICAL PERFORMANCE

Wattage	10W
Lumen Output	1100LM
Efficacy	110LM/W
CCT	3000K
CRI	CRI > 80

ELECTRICAL

Constant Current or Voltage	CONSTANT VOLTAGE
Voltage	12V
Milliamp / Current	98MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	WALL MOUNTED
Construction	STAINLESS STEEL
Height	300 MM
Finish	BRUSHED BRONZE
IP Rating	IP44

ORL1815-BR-3000K-DALI

Item No: 34873

orlight[®]
FROM SOURCE TO SITE

FIXING DETAILS

