


Ref:

ORLLM96-RC-5000K


Item No: NOVA – 15038

orlight[®]
FROM SOURCE TO SITE

Midsized recessed fixture complete with integral CREE XPE LED package and 35 degree beam option. Marine Grade 316 Stainless Steel construction rated to IP68. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all touch temperature requirements. Inline 350mA driver options include switched, mains, 1-10V and DALI dimmable solutions. Please Note: This product does not support hot plugging.

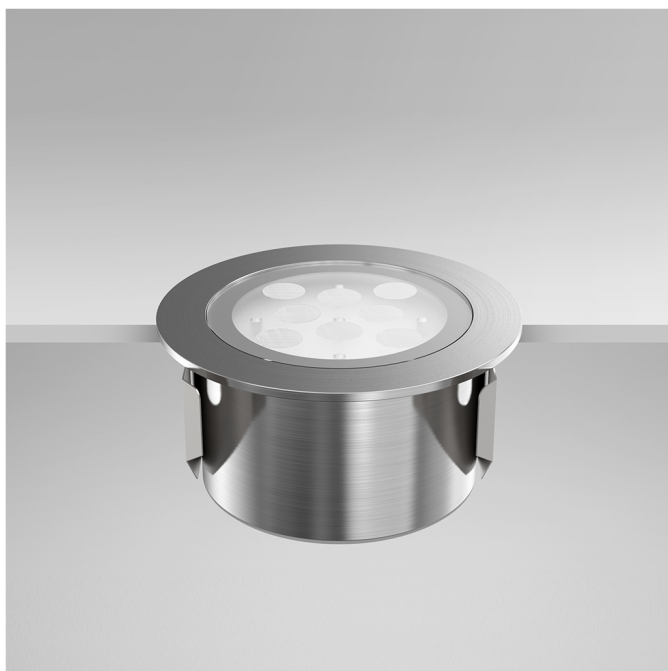

DIMENSIONS

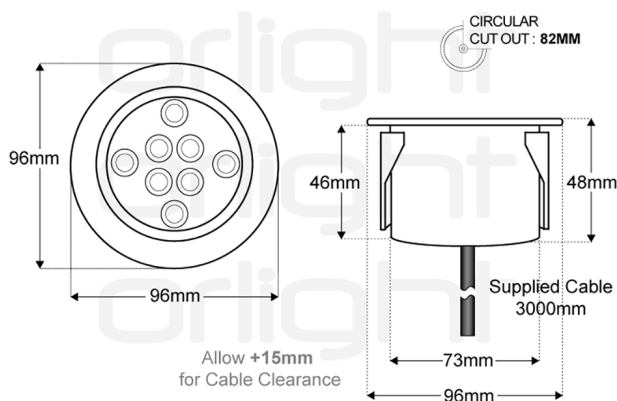

OPTICAL PERFORMANCE

Wattage	8W
Lumen Output	868LM
Efficacy	108LM/W
CCT	5000K
CRI	CRI > 75
Binning	2 STEP MACADAMS
Beam Angle	35°
Chipset	CREE XPE
Chip Life	L70 > 60,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	22-24V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	3000MM


CONSTRUCTION

Installation	RECESSED
Construction	STAINLESS STEEL
Diameter	96 MM
Width / Depth	73 MM
Height	46 MM
Cutout	82 MM
Weight	0.9KG
Finish	316 MARINE GRADE
IP Rating	IP68
IK Rating	IK10
Operating Ambient Temperature	-20°C - +45°C

ORLLM96-RC-5000K

Item No: NOVA – 15038

LIGHT DISTRIBUTION




DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP68	ORLRPV350CC	15231	1	1
Switched	IP42	ORLRPV350-35-APC	15230	2	4
Switched	IP66	ORLRPV350-35-APC-IP66	31555	2	4
Mains	IP20	ORLRPV20D-350MA	46595	1	1
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	2
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	1	1

PLEASE NOTE:


This product does not support hot plugging

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

ORLLM96-RC-5000K

Item No: NOVA – 15038

orlight[®]
FROM SOURCE TO SITE

SWITCHED (IP68)



ORLRPV350CC

15231

Constant current 350mA Driver

MAINS (IP20)




ORLRPV20D-350MA

46595

Mains Dimmable Driver

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI
Driver

ORLLM96-RC-5000K

Item No: NOVA – 15038

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



ACCLMTS168

10310

Inground Tube for LM96 Range