

ORLDOLED3-BL-CROSSLINE-SLT-DALI

ITEM NO: 43411

ORLDOLED3-BL-CROSSLINE-SLT-DALI is a 3 hour Non-Maintained Emergency LED which is designed as a discrete and simple emergency lighting solution to 48V track fed lighting schemes.

The product is only compatible with permanently powered 4-circuit DALI track systems where DALI is used to switch the standard luminaires. If DALI is not being used to monitor the emergency lighting, this product will operate as standalone self-test.


Note: Compatible with Crossline Slim DALI track

Features

- 48V Track Mounted Emergency LED
- Available in RAL9005 (Black)
- DALI-2 Self-Test Operation
- Simple Installation
- 209 Delivered Lumen Output
- 48V Stucchi 4 Circuit Track Systems
- 48V PowerGear 4 Circuit Track Systems



Dimension

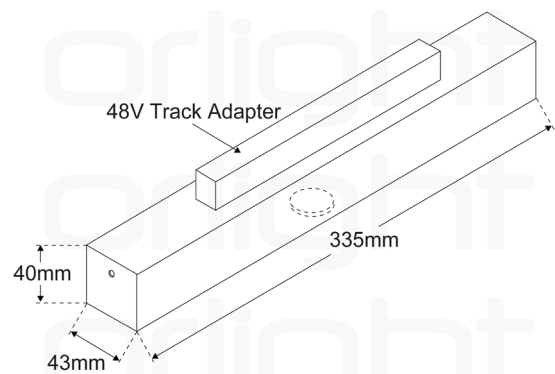

Technical Specification

Input Voltage	48V DC
Power Rating (standby)	3mA $\lambda = 1$ (90% of operational time spent in standby mode)
Power Rating (charging)	30mA $\lambda = 1$
Dimensions	335mm x 43mm x 40mm
Battery Type	3.2V 3.8Ah LiFePO4
Overall Weight	0.6Kg
Ingress Protection	IP20
Ambient Temperature (Ta)	5 to 25°C