

Ref:

# ORL1018-2-IP44-BL


Item No: ORL1018 – 13025

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Twin Trimless magnetic fixture featuring construction rated to IP44 and design to appear invisible in-situ. The fixture incorporates an Anti-Glare baffle with magnetic lamp change mechanism ensuring maintenance functionality without damage to ceilings. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



## DIMENSIONS

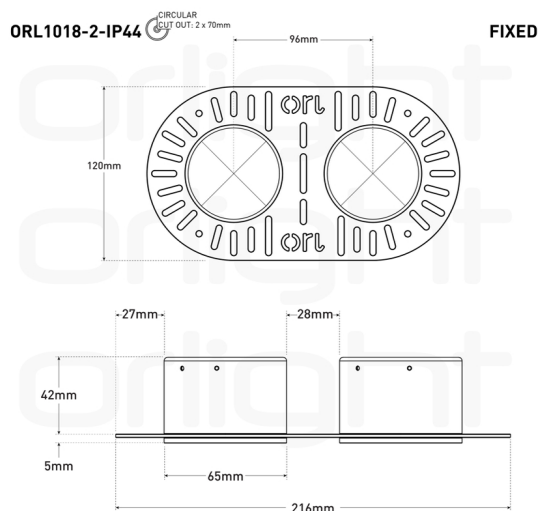


## OPTICAL PERFORMANCE

LOR 72

## CONSTRUCTION

|                         |                    |
|-------------------------|--------------------|
| Installation            | RECESSED TRIMLESS  |
| Construction            | ALUMINIUM          |
| Diameter                | 65 MM X 2          |
| Height                  | 47 MM              |
| Cutout                  | 70 MM X 2          |
| Weight                  | 0.49KG             |
| Tilt                    | FIXED              |
| Rotation                | FIXED              |
| Finish                  | BLACK              |
| RAL                     | RAL 9005           |
| IP Rating               | IP44               |
| Compatible Light Source | GU10 / ENGINE      |
| Lamp Change             | MAGNETIC MECHANISM |

## ADDITIONAL DIMENSIONS

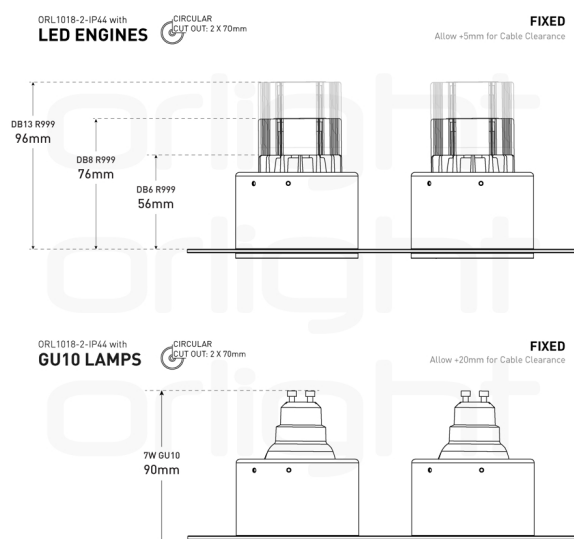

# ORL1018-2-IP44-BL

Item No: ORL1018 – 13025

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## COMPATIBLE GU10 LAMP



**LX4 - SWITCHED**



**LX5 - MAINS DIMMABLE**

## COMPATIBLE LED ENGINE



**DB6-R999**



**DB8-R999**



**DB8-F-R999**



**DB11-R999**



**DB13-R999**

## ACCESSORIES



**MC2-TR**

11915

Long Spring Mains Converter for Orlight Trimless series



**MC2-TR-WL**

11918

Long Spring Mains Converter for Orlight Trimless series with flex