


Ref:

ORL-IRC-9005-3000K


Item No: 33174

orlight[®]
FROM SOURCE TO SITE

Stainless steel surface mounted wall light finished in Black RAL9005 with a glass opal diffuser. Constructed rated to IP44. Integral driver allows for easy installation.

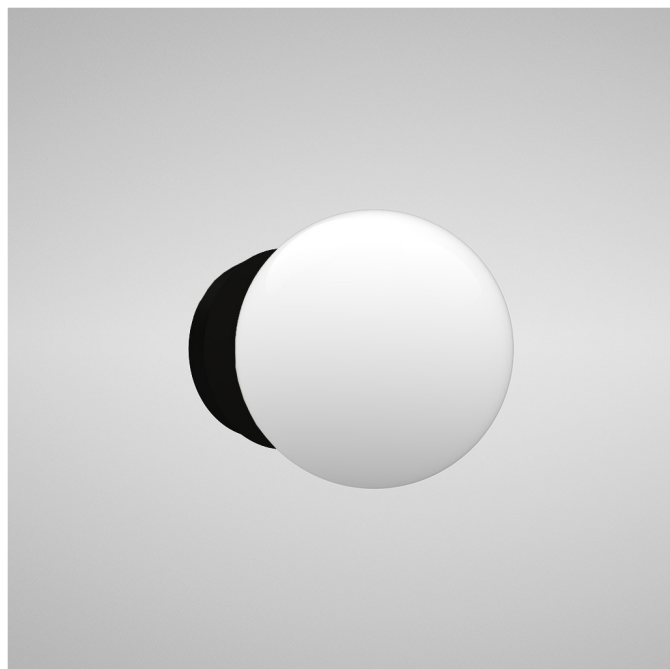

DIMENSIONS

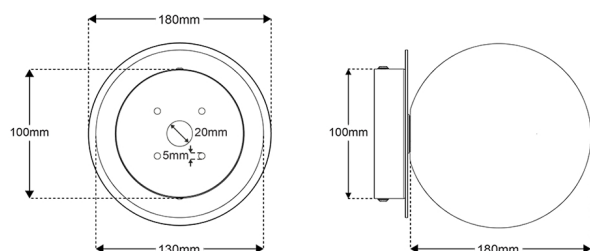

OPTICAL PERFORMANCE

Wattage	6W
Lumen Output	550LM
Efficacy	95LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS

ELECTRICAL

Voltage	220-240V
---------	----------

CONSTRUCTION

Installation	WALL MOUNTED
Diameter	185 MM
Width / Depth	180 MM
Tilt	FIXED
Rotation	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20

ORL-IRC-9005-3000K

Item No: 33174

LIGHT DISTRIBUTION

