

Ref:

# VANTA-110-10W-WH-4K-EM

Item No: VANTA – 45858

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE


The VANTA-110 is a high-performance IP65 external downlight for efficient, low-glare outdoor lighting, with a deep reflector and tempered glass cover for architectural performance. IP rated top and bottom, protected against dust and water ingress; driver located remotely for flexible installation in commercial, residential and architectural exterior projects. Available as a Switched-EM option; suits entrances, walkways, canopies, facades and covered outdoor spaces. Note: Does not support hot plugging; do not cut holes before receiving product.



**NEW!**

## DIMENSIONS

CIRCULAR  
CUT OUT: 90MM

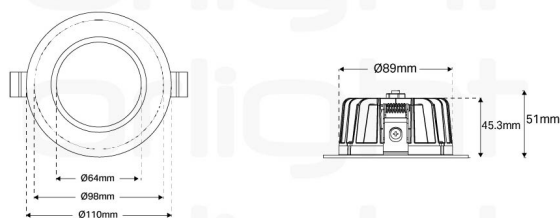

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 10W              |
| Lumen Output         | 1050LM           |
| Efficacy             | 105LM/W          |
| CCT                  | 4000K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 60°              |
| Chipset              | BRIDGELUX        |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 220-240V         |
| Milliamp / Current          | 250MA            |
| Driver Configuration        | REMOTE           |
| Control                     | SWITCHED         |

## CONSTRUCTION

|                               |                  |
|-------------------------------|------------------|
| Installation                  | CEILING RECESSED |
| Construction                  | ALUMINIUM        |
| Diameter                      | 110 MM           |
| Height                        | 51 MM            |
| Cutout                        | 90 MM            |
| Tilt                          | FIXED            |
| Finish                        | WHITE            |
| RAL                           | RAL 9016         |
| IP Rating                     | IP65             |
| IK Rating                     | IK06             |
| Operating Ambient Temperature | -20°C - +45°C    |

## EMERGENCY

|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | REMOTE         |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 315LM          |

# VANTA-110-10W-WH-4K-EM

Item No: VANTA – 45858

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## PLEASE NOTE:

- This product does not support hot plugging
- Do not cut holes before receiving product.