

Ref:

VECTIV-SUS-64W-BL-4K-1965-DALI-B-EM

Item No: VECTIV – 42334

orlight[®]
FROM SOURCE TO SITE


Elevate your professional space with our advanced aluminium linear fixture. The suspended version, showcasing a state-of-the-art pod louvre design, seamlessly integrates into your environment. With an integral driver for added convenience, this fixture provides sleek and efficient lighting, setting a new standard for contemporary, sophisticated illumination in professional settings. Configurations in excess of a standard single length, please refer to the length matrix here which provides options for lengths up to 15M.



UGR
< 19

IP20

DIMENSIONS

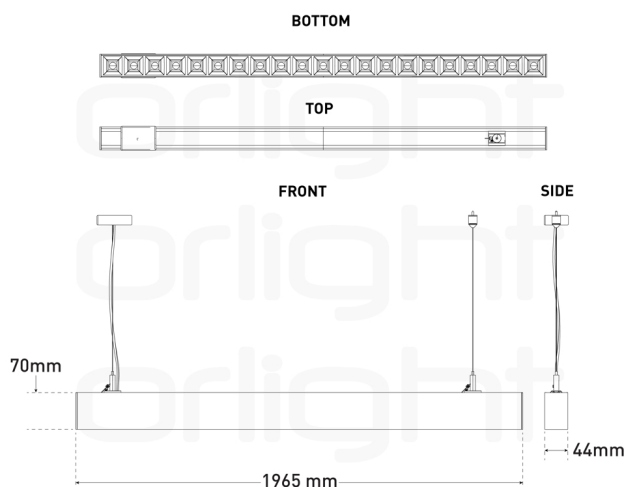

OPTICAL PERFORMANCE

Wattage	64W
Lumen Output	7680LM
Efficacy	120LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	80°
UGR	<19
Chipset	OSRAM 2835
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220V
Milliamp / Current	1400MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SUSPENDED
Construction	ALUMINIUM
Length	1965 MM
Width / Depth	44 MM
Height	70 MM
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
IK Rating	IK08
Operating Ambient Temperature	-20°C - +60°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	355LM

VECTIV-SUS-64W-BL-4K-1965-DALI-B-EM

Item No: VECTIV – 42334

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



ADDITIONAL DIMENSIONS

