


Ref:

ORLLM214-6000K


Item No: TERRA – 14906

orlight[®]
FROM SOURCE TO SITE

Bar stock aluminium surface mounted projector complete with integral CREE LED package. Fixture rated to IP67 and configured to 30 degree beam as standard. No mechanical joints to light source ensures robust protection against water ingress. Product runs cool meeting all touch temperature requirements. Suitable for the illumination of small/medium trees, building exteriors, columns. Please Note: This product does not support hot plugging.

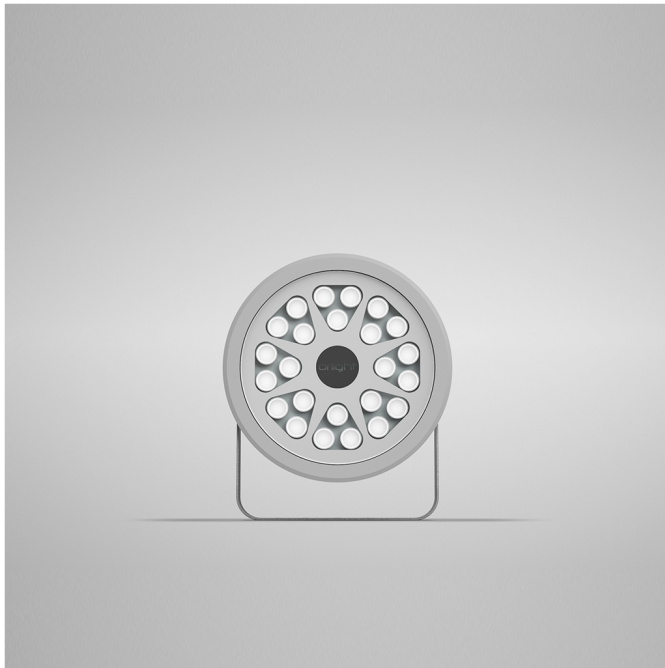

DIMENSIONS

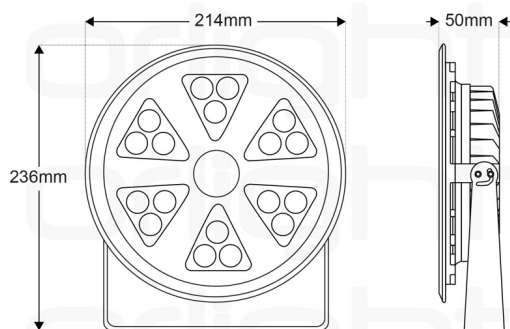

Cable Length: 3000mm

OPTICAL PERFORMANCE

Wattage	24W
Lumen Output	2834LM
Efficacy	118LM/W
CCT	6000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	30°
Chipset	CREE XPE
Chip Life	L70 > 60,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	70V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	3000MM


CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Diameter	214 MM
Width / Depth	50 MM
Height	236 MM
Weight	1.7KG
Tilt	ADJUSTABLE
Rotation	FIXED
Finish	ALUMINIUM
IP Rating	IP67
IK Rating	IK07
Operating Ambient Temperature	-20°C - +50°C

ORLLM214-6000K

Item No: TERRA – 14906

LIGHT DISTRIBUTION



DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP42	ORLRPV350-35-APC	15230	1	1
Switched	IP66	ORLRPV350-35-APC-IP66	31555	1	1

PLEASE NOTE:

This product does not support hot plugging

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

ORLLM214-6000K

Item No: TERRA – 14906

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



ORLLM214-POLE-BRK

14908

Pole Mounted Bracket for LM214