

Ref:

TD2-G11-LED-3000K


Item No: G11 – 17064

orlight[®]
FROM SOURCE TO SITE

G11 retrofit LED lamp to be used in conjunction with a dedicated 300mA driver. 2G11 Base that requires TDLED2G11-LPH.



DIMENSIONS

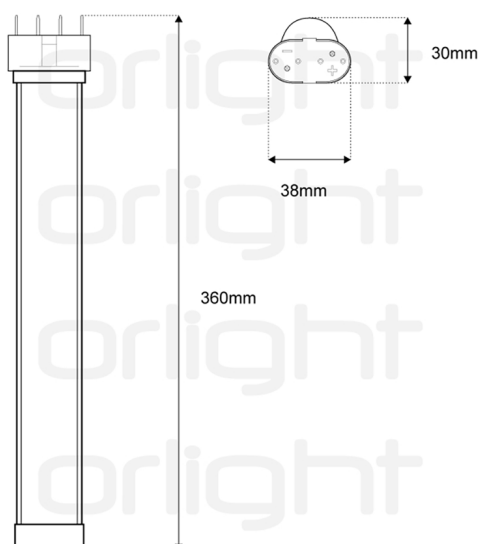

OPTICAL PERFORMANCE

Wattage	12.5W
Lumen Output	1300LM
Efficacy	104LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	130°

ELECTRICAL

Voltage	42V
Milliamp / Current	300MA
Driver Configuration	REMOTE

CONSTRUCTION


Installation	RETROFIT
Construction	ALUMINIUM
Length	360 MM
Width / Depth	38 MM
Height	30 MM
Finish	WHITE
IP Rating	IP20
Lamp Base	2G11

TD2-G11-LED-3000K

Item No: G11 – 17064

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



MAINS DRIVER



MAXDR-MINI-300MA

22250

Mini 1-10V/DALI & Push Dimming Driver

1-10V/DALI DRIVER




DOMINO-300MA-DR-DIM

21974

Switched & Mains Dimmable Driver

ACCESSORIES



TD2G11-LPH

17066

Lamp Holder