

Ref:

# VECTIV-DUO-63W-BL-27K-1405-DALI

Item No: VECTIV – 34253

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE


Enhance your professional space with our advanced aluminium linear fixture in the suspended duo version. Featuring a state-of-the-art pod louvre design, it seamlessly integrates into your environment, providing both upward and downward lighting. With an integral driver for added convenience, this fixture delivers sleek and efficient illumination, setting a new standard for contemporary sophistication in professional settings. Configurations in excess of a standard single length, please refer to the length matrix here which provides options for lengths up to 15M.



UGR  
< 19

IP20

## DIMENSIONS

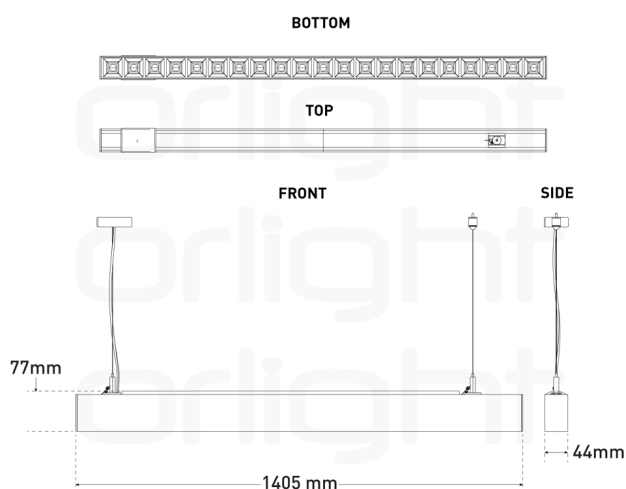

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 63W              |
| Lumen Output         | 6804LM           |
| Efficacy             | 108LM/W          |
| CCT                  | 2700K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 80°              |
| UGR                  | <19              |
| Chipset              | OSRAM 2835       |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                    |
|-----------------------------|--------------------|
| Constant Current or Voltage | CONSTANT CURRENT   |
| Voltage                     | 220V               |
| Milliamp / Current          | ↓ 1000MA   ↑ 500MA |
| Driver Configuration        | INTEGRAL           |
| Control                     | DALI DIMMABLE      |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | SUSPENDED     |
| Construction                  | ALUMINIUM     |
| Length                        | 1405 MM       |
| Width / Depth                 | 44 MM         |
| Height                        | 77 MM         |
| Finish                        | BLACK         |
| RAL                           | RAL 9005      |
| IP Rating                     | IP20          |
| IK Rating                     | IK08          |
| Operating Ambient Temperature | -20°C - +60°C |

## EMERGENCY


|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | INTEGRAL  |

# VECTIV-DUO-63W-BL-27K-1405-DALI

Item No: VECTIV – 34253

**orlight®**  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## ADDITIONAL PRODUCT IMAGES



## ADDITIONAL DIMENSIONS

