

Ref:

LUMINO-REFLECT-10W-1M-BL-3K-4K

Item No: LUMINO – 33368

orlight[®]
FROM SOURCE TO SITE


Ground mounted exterior bollard with louvre reflector and constructed from die cast aluminium. Rated to IP65 and available in 3000k or 4000k.



SWITCHABLE
CCT

IP65

DIMENSIONS

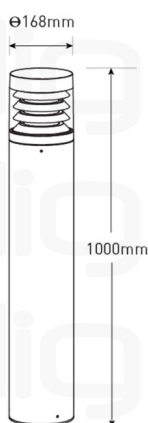

OPTICAL PERFORMANCE

Wattage	10W
Lumen Output	469LM / 514LM
Efficacy	47LM/W / 51LM/W
CCT	3000K/4000K
CRI	CRI > 80
Chipset	2835 LED

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	100-240V
Milliamp / Current	220MA
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION


Installation	SURFACE / ROOT
Construction	ALUMINIUM
Diameter	168 MM
Height	1000 MM
Weight	5.75KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65
IK Rating	IK09

LUMINO-REFLECT-10W-1M-BL-3K-4K

Item No: LUMINO – 33368

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ROOT MOUNT KIT



LUMINO-ROOT-MOUNT-KIT
28884
Root Mount Kit