

Ref:

ORL009-TLSV-CL-IP54-WH-9016-NL

Item No: ORL009 – 32838

orlight[®]
FROM SOURCE TO SITE

Directional architectural miniature downlight featuring an anti-glare baffle and minimal bezel. 72 mm diameter for discreet installation with 30° tilt capability. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE


LOR	52
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	72 MM
Height	52 MM
Cutout	64 MM
Weight	0.07KG
Tilt	30°
Rotation	360°
Finish	WHITE
RAL	RAL 9016
IP Rating	IP54
Compatible Light Source	LED ENGINE
Lamp Change	REMOVAL OF FIXTURE

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

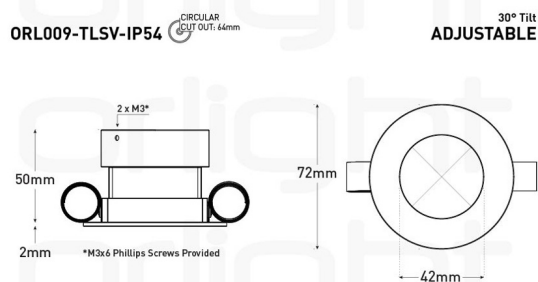


ORL009-TLSV-CL-IP54-WH-9016-NL

Item No: ORL009 – 32838

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

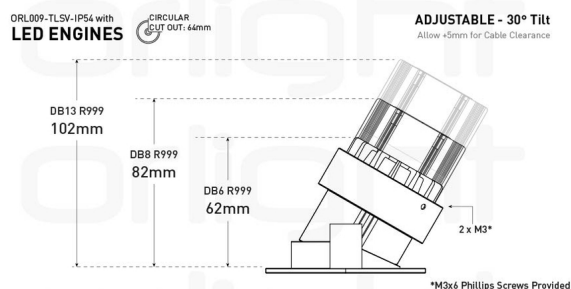

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999




DB13-R999

ORL009-TLSV-CL-IP54-WH-9016-NL

Item No: ORL009 – 32838

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre