


Ref:

ORL1551U-CE-WH-LED-3K-DALI-B-EM


Item No: ORL1551 – 30306

orlight[®]
FROM SOURCE TO SITE

High powered decorative round fixture features Aluminium construction and anti-glare glass diffuser. Integral LED Driver. Designed to be used with Conduits. The fixture is rated to IP65 and is available in a variety of finishes. Mains switched, 3 hour emergency, Occupancy detection, DALI and 1-10V options.

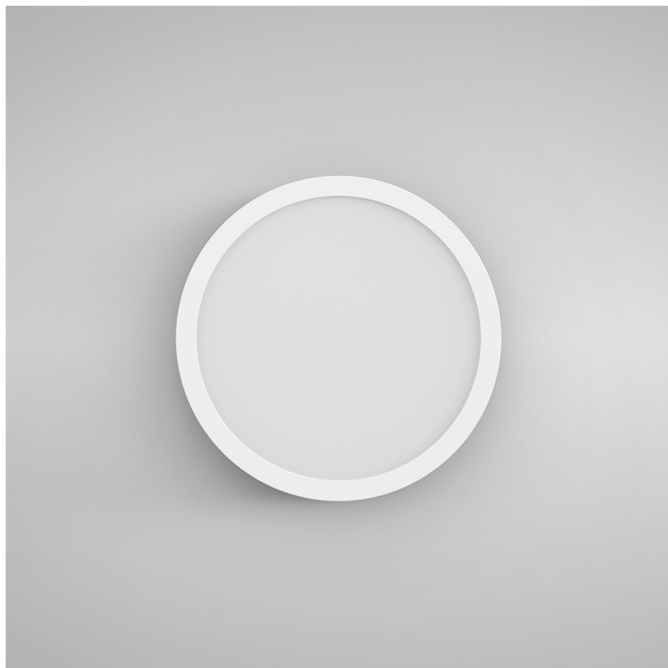

DIMENSIONS

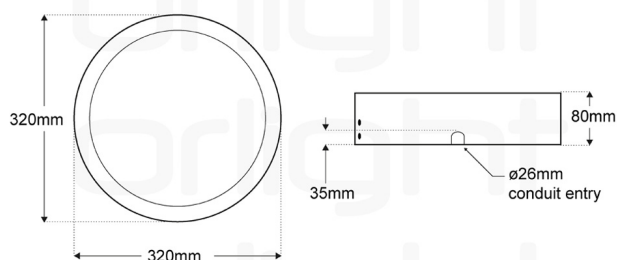

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2220LM
Efficacy	111LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	550MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	320 MM
Height	80 MM
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK06
Operating Ambient Temperature	-25°C - +45°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	332LM

ORL1551U-CE-WH-LED-3K-DALI-B-EM

Item No: ORL1551 – 30306

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

Gear Tray Fixing Details

