

Ref:


ORLLED-SL-6060-20W-3K-9016-DALI

Item No: PANEL-SL – 28578

orlight[®]
FROM SOURCE TO SITE

Thin trim LED panel offers a super slim 4mm trim, creating a near frameless light surface. White RAL-9016 finished Aluminium surrounded with quadraprism diffuser allows full V0 and UGR compliance. This luminaire can be recessed and suspended. Emergency options available. Please


Note: This product does not support hot plugging.

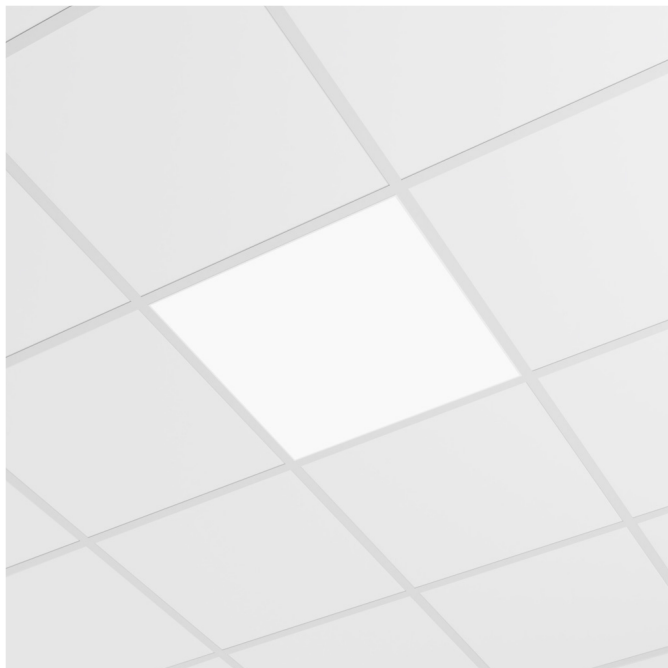

UGR
< 19

IP40

DIMENSIONS

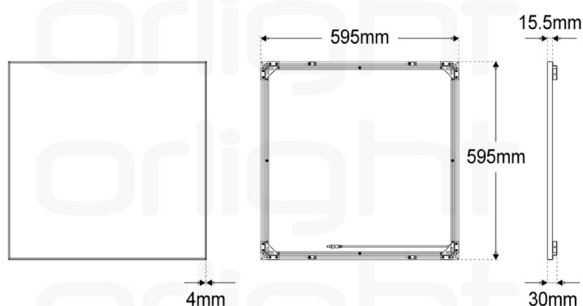

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2480LM
Efficacy	124LM/W
CCT	3000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	UGR < 19
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Milliamp / Current	500MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	595 MM
Width / Depth	595 MM
Height	15.5 MM
Weight	3.5KG
Diffuser	MICROPRISMATIC
Finish	WHITE
RAL	RAL 9016
IP Rating	IP40


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE


ORLLED-SL-6060-20W-3K-9016-DALI

Item No: PANEL-SL – 28578

LIGHT DISTRIBUTION



SURFACE MOUNTING KIT

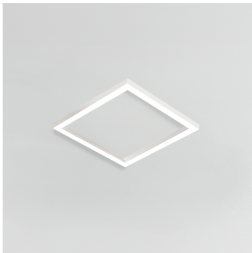

CEILING-CRADLE-6060-SMK-9016
17768
Cradle for LED Panel

SUSPENSION KIT



SUS-KIT-PANEL-GP
17047
Suspension Kit Gripper



SUS-KIT-LOOP
17041
Suspension Kit Loop