


Ref:

ORLIR1M-AW-9016-NL

Item No: ORLIR – 14668

orlight[®]
FROM SOURCE TO SITE

Architectural downlight featuring an anti-glare baffle and magnetic lamp change mechanism. 360 Degree rotation and tilt capability. Discreet application due to minimal trim bezel designed appear trimless in-situ. Orlight does not recommend cutting of holes prior to receipt of product in hand.

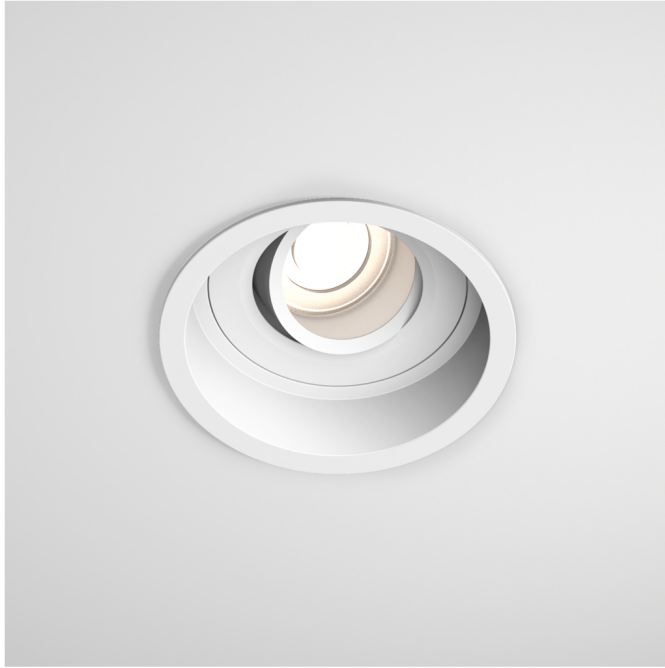

DIMENSIONS

OPTICAL PERFORMANCE


LOR	60
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	88 MM
Height	67 MM
Cutout	81 MM
Weight	0.145KG
Tilt	30°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

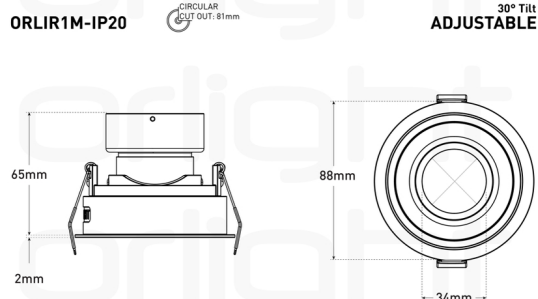


ORLIR1M-AW-9016-NL

Item No: ORLIR – 14668

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

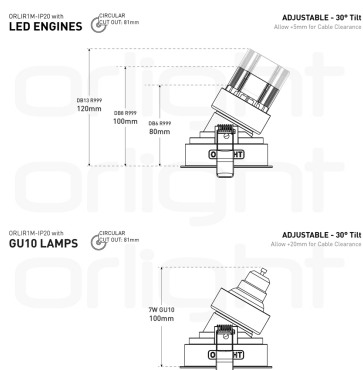

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

ORLIR1M-AW-9016-NL

Item No: ORLIR – 14668


ACCESSORIES



MC1
11894
Standard Mains Converter



MC1-SL-WL
11901
Slim Spring Mains Converter for Orlight Classic, Twist & Lock & Shower series.



LOUVRE-HC
11753
Honeycomb Louvre