

Ref:

CMF-20W-9016-4K-DALI-B-EM


Item No: CMF PANEL – 27944

orlight[®]
FROM SOURCE TO SITE

The CMF is a low UGR suspended linear panel constructed from Aluminium and rated to IP20. The fitting comes with an integral driver. Colour consistency is adhered to with a 2-Step MacAdams Ellipse binning strategy alongside an LED chipset at CRI>80 ensuring light quality. Available as Switched, 1-10V and DALI dimming options in 3000k and 4000K colour temperature.



DIMENSIONS

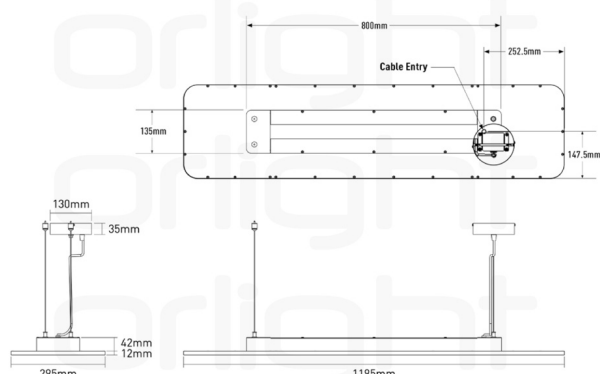

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2620LM
Efficacy	131LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	UGR < 19
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220V
Milliamp / Current	450MA
Driver Configuration	FIXTURE MOUNTED
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SUSPENDED
Construction	ALUMINIUM
Length	1195 MM
Width / Depth	295 MM
Height	54 MM
Weight	5.5KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY

Emergency	YES
Emergency Configuration	FIXTURE MOUNTED
Emergency Duration	EMERGENCY 3HRS
EM Lumen	393LM

CMF-20W-9016-4K-DALI-B-EM

Item No: CMF PANEL – 27944

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

