

Ref:

# FALCON-28W-AN-3K


Item No: FALCON – 11133

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Exterior wall mounted bulkhead constructed to IP65 and IK10. Finished in Black RAL9005 or Anthracite RAL7016 with a clear diffuser. CRI >80 for light quality assurance.



## DIMENSIONS

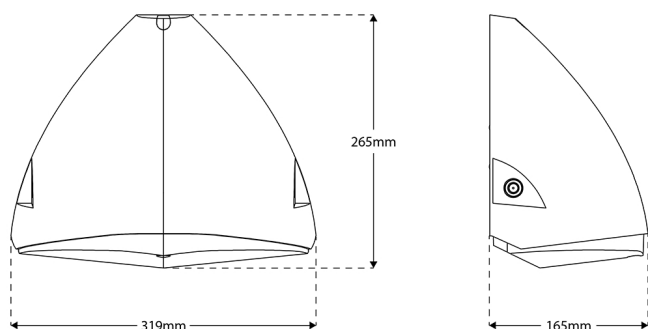

## OPTICAL PERFORMANCE

|              |                 |
|--------------|-----------------|
| Wattage      | 28W             |
| Lumen Output | 3780LM          |
| Efficacy     | 135LM/W         |
| CCT          | 3000K           |
| CRI          | CRI > 83        |
| Binning      | 2 STEP MACADAMS |
| Beam Angle   | 120°            |
| Chipset      | SMD 2835        |
| Chip Life    | L70 > 60,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 220-240V         |
| Milliamp / Current          | 725MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | SWITCHED         |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | WALL MOUNTED  |
| Construction                  | ALUMINIUM     |
| Length                        | 319 MM        |
| Width / Depth                 | 165 MM        |
| Height                        | 265 MM        |
| Weight                        | 2.35KG        |
| Finish                        | GREY          |
| RAL                           | RAL 7016      |
| IP Rating                     | IP65          |
| IK Rating                     | IK10          |
| Operating Ambient Temperature | -20°C - +40°C |

## EMERGENCY

|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | INTEGRAL  |

# FALCON-28W-AN-3K

Item No: FALCON – 11133

## LIGHT DISTRIBUTION

