


Ref:

VECTOR2-3000K-1000MM-DALI


Item No: VECTOR – 31091

orlight[®]
FROM SOURCE TO SITE

Solid state linear LED bar constructed from Aluminium featuring a narrow 10° beam angle, light shield and adjustable wall mounted tilt bracket. Construction rated to IP67 and IK06, suitable for exterior applications. Please Note: This product does not support hot plugging.

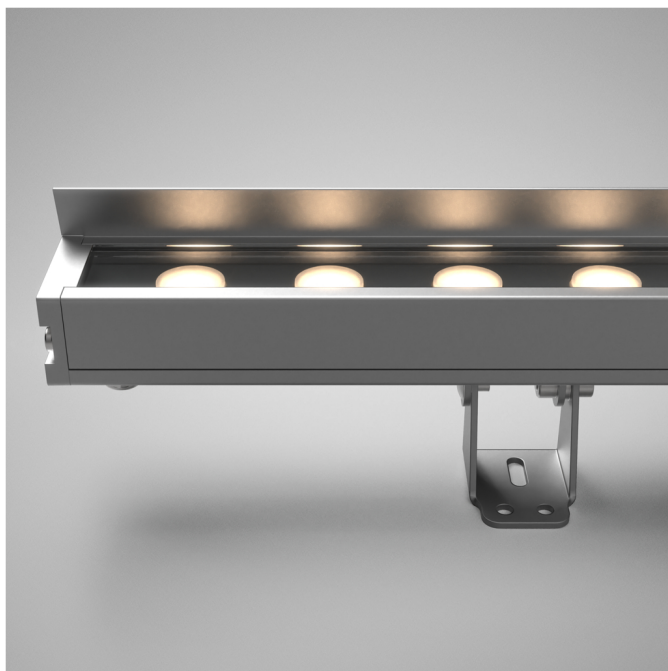

DIMENSIONS

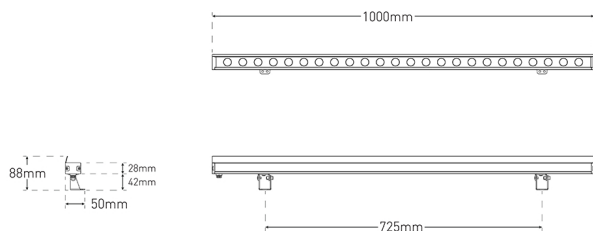

OPTICAL PERFORMANCE

Wattage	22W
Lumen Output	1757LM
Efficacy	80LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	10°
Chipset	CREE XPE2 7D
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT VOLTAGE
Voltage	24VDC
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION


Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Length	1000MM
Height	71 MM
Weight	2KG
Tilt	ADJUSTABLE
Finish	IRON GREY
IP Rating	IP67
IK Rating	IK06

VECTOR2-3000K-1000MM-DALI

Item No: VECTOR – 31091

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



PLEASE NOTE:

This product does not support hot plugging