


Ref:

ORLLM760-SS-3000K-2


Item No: MEDIO – 14997

orlight[®]
FROM SOURCE TO SITE

Miniature recessed fixture complete with integral CREE LED package and 35 degree beam option. White finish features an Aluminium construction with Epoxy Power coat rated to IP65. Product footprint of 60mm diameter ensures versatile application. Inline driver options include switched, 1-10V and DALI dimmable solutions. Please Note: This product does not support hot plugging.

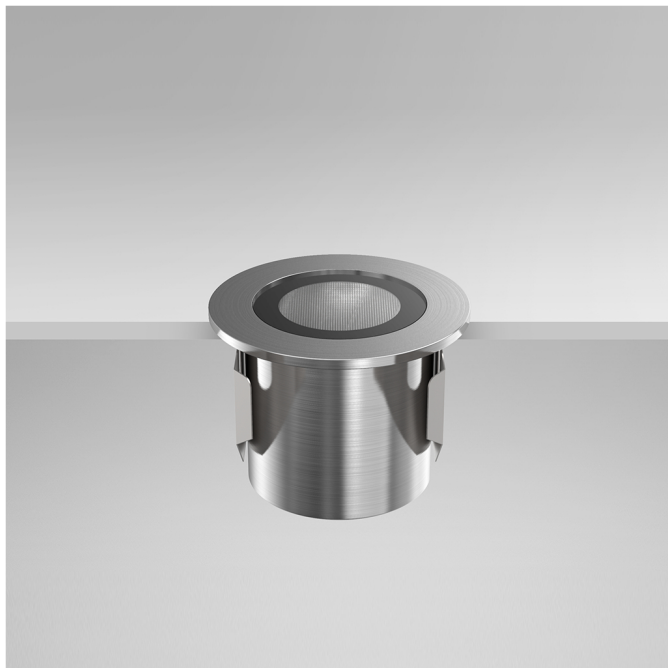

DIMENSIONS

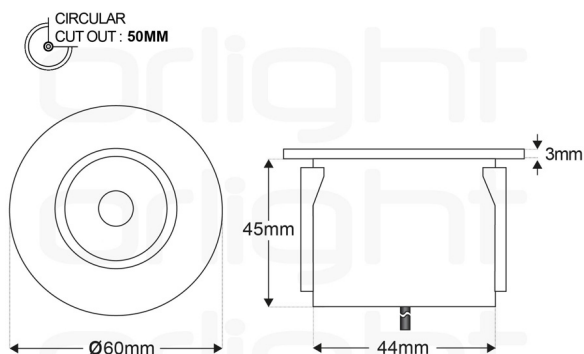

Cable Length: 3000mm

OPTICAL PERFORMANCE

Wattage	2W
Lumen Output	136LM
Efficacy	68LM/W
CCT	3000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	35°
Chipset	CREE
Chip Life	L70 > 60,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	3V
Milliamp / Current	500MA
Driver Configuration	REMOTE
Cable Length	3000MM

CONSTRUCTION


Installation	RECESSED
Construction	STAINLESS STEEL
Diameter	60 MM
Width / Depth	44 MM
Height	45 MM
Cutout	50 MM
Weight	0.465KG
Finish	316 MARINE GRADE
IP Rating	IP68
IK Rating	IK07
Operating Ambient Temperature	-20°C - +45°C

ORLLM760-SS-3000K-2

Item No: MEDIO – 14997

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION




DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP20	MAXDR-MINI-500MA	22253	1	12
Mains	IP20	ORLRPV20D-500MA	43630	1	10

PLEASE NOTE:

This product does not support hot plugging

SWITCHED (IP20)



MAXDR-MINI-500MA

22253

Mini 1-10V/DALI & Push Dimming Driver

MAINS (IP20)



ORLRPV20D-500MA

43630

Mains Dimmable Driver

ORLLM760-SS-3000K-2

Item No: MEDIO – 14997

orlight[®]
FROM SOURCE TO SITE

1-10V/PUSH (IP20)




MAXDR-MINI-500MA

22253

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



MAXDR-MINI-500MA

22253

Mini 1-10V/DALI & Push Dimming Driver

ACCESSORIES



ACCLMTS116

10306

Inground Tube for LM760 Range