

Ref:

ORLLM760-SQ-WH-6000K


Item No: MEDIO – 14994

orlight[®]
FROM SOURCE TO SITE

Square recessed fixture complete with integral CREE LED package and 30 degree beam option. Marine Grade 316 Stainless Steel option with construction rated to IP68. White finish option features a Aluminium construction with Epoxy Power coat rated to IP65. Small Product footprint ensures versatile application. Inline driver options include switched, 1-10V and DALI dimmable solutions. Please Note: This product does not support hot plugging.



DIMENSIONS

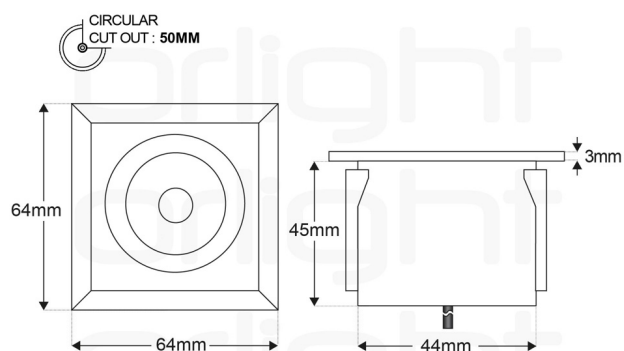

Cable Length: 3000mm

OPTICAL PERFORMANCE

Wattage	1W
Lumen Output	107LM
Efficacy	107LM/W
CCT	6000K
CRI	CRI > 70
Binning	2 STEP MACADAMS
Beam Angle	30°
Chipset	CREE
Chip Life	L70 > 60,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	3V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	3000MM


CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	64 MM
Width / Depth	64 MM
Height	45 MM
Cutout	50 MM
Weight	0.49KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK07
Operating Ambient Temperature	-20°C - +45°C

ORLLM760-SQ-WH-6000K

Item No: MEDIO – 14994

LIGHT DISTRIBUTION




DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP68	ORLRPV350CC	15231	1	8
Switched	IP42	ORLRPV350-35-APC	15230	10	30
Switched	IP66	ORLRPV350-35-APC-IP66	31555	10	30
Mains	IP20	ORLRPV20D-350MA	46595	1	13
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	15
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	2	13

PLEASE NOTE:

This product does not support hot plugging

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

ORLLM760-SQ-WH-6000K

Item No: MEDIO – 14994

orlight[®]
FROM SOURCE TO SITE

SWITCHED (IP68)



ORLRPV350CC

15231

Constant current 350mA Driver

MAINS (IP20)



ORLRPV20D-350MA

46595

Mains Dimmable Driver

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI Driver

ORLLM760-SQ-WH-6000K

Item No: MEDIO – 14994

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



ACCLMTS116

10306

Inground Tube for LM760 Range