

Ref:

GLIDE-MIDI-TR-10W-WH-3K

Item No: GLIDE – 45012

orlight[®]
FROM SOURCE TO SITE

High-performance trimless solid-state adjustable LED downlight with high CRI for accurate colour rendering. Featuring a compact aluminium body, all-white finish and low-glare optics for seamless architectural integration.



NEW!


DIMENSIONS

GLIDE-MIDI-TR



350° Rotation

30° Tilt

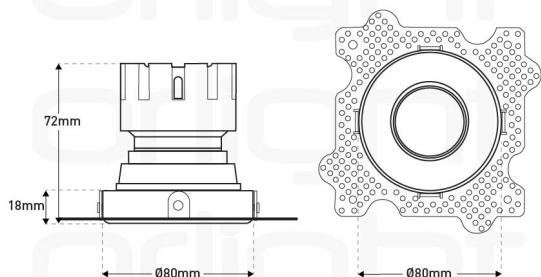

OPTICAL PERFORMANCE

Wattage	10W
Lumen Output	1240LM
Efficacy	124LM/W
CCT	3000K
CRI	CRI > 96
Binning	2 STEP MACADAMS
Beam Angle	12° / 24° / 36° / 55°
Chipset	BRIDGELUX

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Milliamp / Current	250MA
Driver Configuration	REMOTE

CONSTRUCTION

Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	80 MM
Height	72 MM
Cutout	72 MM
Tilt	30°
Rotation	350°
Finish	MATT WHITE
RAL	RAL 9010
IP Rating	IP54

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE