

Ref:

ORLEDGE-3M-FL-9005-4000K


Item No: EDGE – 14109

orlight[®]
FROM SOURCE TO SITE

This LED 3M flange-mounted post light creates a dramatic lighting effect for urban, residential, hospitality, retail, and commercial applications. The poles are constructed of box section 101.6 x 101.6 x 3.25mm Grade 6082 T6 aluminium alloy, finished in RAL9005 and rated to IP65. Access to lamp and control gear via four removable screws. Covered under BS EN 40-3-1:2013, PD6547:2004. Fixings not included.



DIMENSIONS

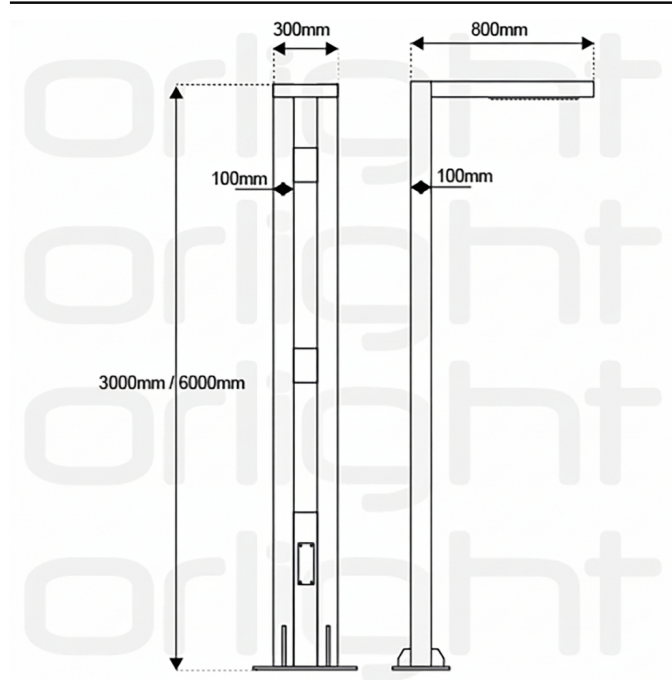

OPTICAL PERFORMANCE

Wattage	80W
Lumen Output	8300LM
Efficacy	104LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Chipset	LED CHIPSET
Chip Life	L70 > 54,000HRS

ELECTRICAL

Voltage	85V-265V
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION


Installation	SURFACE MOUNTED
Construction	GRADE 6082 ALUMINIUM
Length	800 MM
Width / Depth	300 MM
Height	3000 MM
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65

ORLEDGE-3M-FL-9005-4000K

Item No: EDGE – 14109

orlight[®]
FROM SOURCE TO SITE


LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



ROOT MOUNT KIT



ORLEDGE-RT-MOUNT

14122

EDGE Post Root Mount Accessory