


Ref:

ORLLM736-BR-4000K


Item No: LITO – 14954

orlight[®]
FROM SOURCE TO SITE

Miniature recessed fixture complete with integral CREE LED package. Frosted optic serves to minimise glare coupled with a diffuse beam distribution. Marine Grade 316 Stainless Steel option with construction rated to IP68. Bronze option features construction to IP65. White finish option features an Aluminium construction with Epoxy Power coat rated to IP65. Product footprint of 22mm diameter ensures versatile application. Please Note: This product does not support hot plugging.

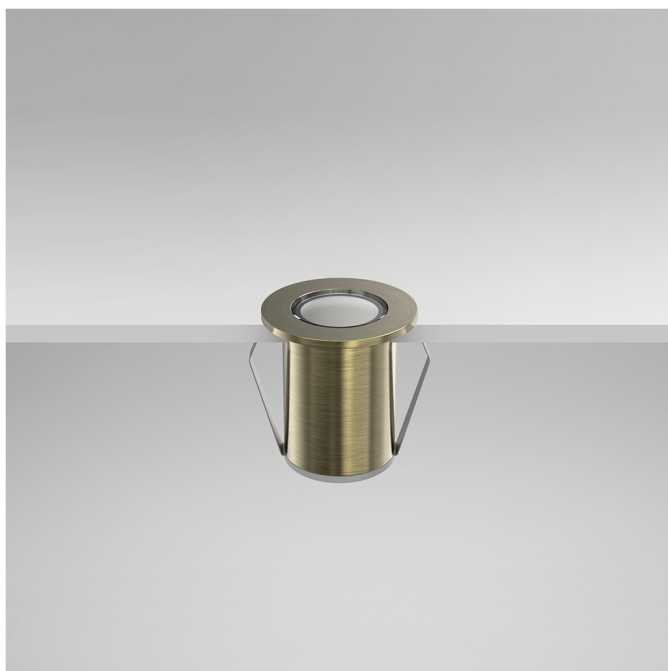

DIMENSIONS

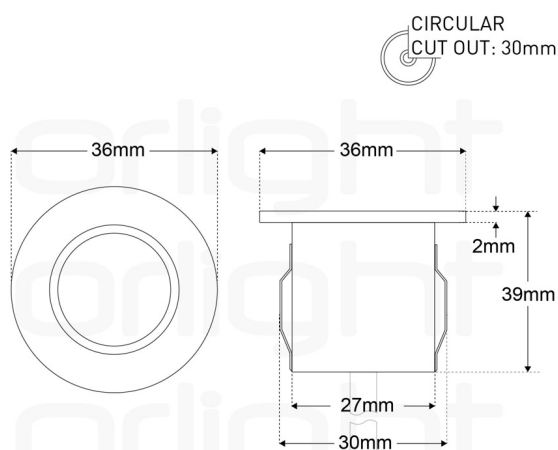

Cable Length: 3000mm

OPTICAL PERFORMANCE

Wattage	1W
Lumen Output	70LM
Efficacy	70LM/W
CCT	4000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	115°
Chipset	CREE 5050
Chip Life	L70 > 60,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT VOLTAGE
Voltage	12V
Driver Configuration	REMOTE
Cable Length	3000MM

CONSTRUCTION


Installation	RECESSED
Construction	ALUMINIUM
Diameter	36 MM
Width / Depth	28 MM
Height	39 MM
Cutout	30 MM
Tilt	FIXED
Finish	BRONZE
IP Rating	IP65
IK Rating	IK07
Operating Ambient Temperature	-20°C - +50°C

ORLLM736-BR-4000K

Item No: LITO – 14954

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



PLEASE NOTE:

This product does not support hot plugging

SWITCHED DRIVER



ORLRPV12-3
15182
12V Switched Driver



ORLRPV1218
15179
12V Switched Driver

ACCESSORIES



ACCLMTS118
10307
Inground Tube for LM736 Range