

Ref:

# ULTRA-4L-25W-WH-3K4K-EM

Item No: ULTRA LOUVRE – 35530

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Our Ultra Louvre fixtures combine classic style with modern functionality, featuring a louvre cover and UGR19-rated optics for glare-free lighting. Designed for versatility, they can be surface mounted or suspended, and offer switchable colour temperatures from 3000K to 4000K. These fixtures provide both aesthetic appeal and practical lighting solutions for various commercial settings.




UGR  
< 19

SWITCHABLE  
CCT

IP20

## DIMENSIONS

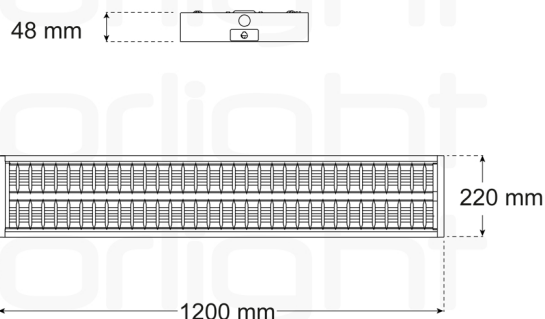

## OPTICAL PERFORMANCE

|                      |                   |
|----------------------|-------------------|
| Wattage              | 25W               |
| Lumen Output         | 3475LM / 3600LM   |
| Efficacy             | 139LM/W / 144LM/W |
| CCT                  | 3000K/4000K       |
| CRI                  | CRI > 80          |
| Binning              | 2 STEP MACADAMS   |
| Beam Angle           | 90°               |
| UGR                  | UGR < 19          |
| Chipset              | ORLIGHT LED       |
| Calculated Chip Life | L70 > 105,000HRS  |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 220-240V         |
| Milliamp / Current          | 250MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | SWITCHED         |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | SURFACE       |
| Construction                  | ALUMINIUM     |
| Length                        | 1200 MM       |
| Width / Depth                 | 220 MM        |
| Height                        | 48 MM         |
| Weight                        | 3.86KG        |
| Finish                        | WHITE         |
| RAL                           | RAL 9003      |
| IP Rating                     | IP20          |
| IK Rating                     | IK06          |
| Operating Ambient Temperature | -20°C - +40°C |

## EMERGENCY


|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | INTEGRAL       |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 418LM / 433LM  |

# ULTRA-4L-25W-WH-3K4K-EM

Item No: ULTRA LOUVRE – 35530

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION

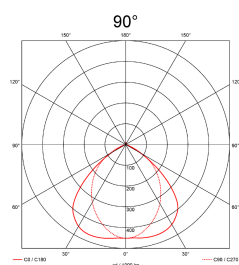

## ADDITIONAL PRODUCT IMAGES



## SUSPENSION KIT



### ULTRA-SUS-KIT/ULTRA-L-SUS-KIT-1M

41236

Ultra Suspension Kit