

Ref:

VANTA-110-13W-WH-3K-DALI-B-EM

Item No: VANTA – 45869

orlight[®]
FROM SOURCE TO SITE


The VANTA-110 is a high-performance IP65 external downlight for efficient, low-glare outdoor lighting, with a deep reflector and tempered glass cover for architectural performance. IP rated top and bottom, protected against dust and water ingress; driver located remotely for flexible installation in commercial, residential and architectural exterior projects. Available as a DALI-B-EM option; suits entrances, walkways, canopies, facades and covered outdoor spaces. Note: Does not support hot plugging; do not cut holes before receiving product.



NEW!

DIMENSIONS

CIRCULAR
CUT OUT: 90MM

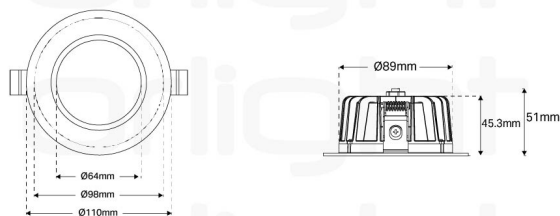

OPTICAL PERFORMANCE

Wattage	13W
Lumen Output	1326LM
Efficacy	102LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	60°
Chipset	BRIDGELUX
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	320MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Diameter	110 MM
Height	51 MM
Cutout	90 MM
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK06
Operating Ambient Temperature	-20°C - +45°C

EMERGENCY


Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	306LM

VANTA-110-13W-WH-3K-DALI-B-EM

Item No: VANTA – 45869

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



PLEASE NOTE:

- This product does not support hot plugging
- Do not cut holes before receiving product.